

# GMÖHLING



„Made in Germany“ identifies Gmöhling as a medium-sized family business at our premises in Fürth, Germany. We have been developing and manufacturing our quality products exclusively in Germany for over 80 years. The name Gmöhling stands for quality and durability.


In 1948 Gmöhling designed and built the first foldable aluminium box worldwide for the Berlin Airlift.

Conception, development and production in Germany is still feasible today. We have highly qualified, internationally experienced employees, creative minds in our development and construction departments and optimally trained personnel in our manufacturing area.

We place a great deal of value in modern, economic production processes. Thanks to our many years of experience and proven innovations, we are recognised for the development and manufacture of high-quality aluminium products made to customer's requirements worldwide since 1941. It's not surprising that our share of exports is over 50 percent - even to countries known for low manufacturing costs.


- High degree of flexibility due to the traditional strengths of medium-sized companies
- Personal support by a contact partner assigned to you
- High level of knowledge of industry-specific requirements
- Short response times to special customer requirements
- Unbureaucratic, short-term application possibilities
- Manufacturing of small or large scale series
- Development of individual solutions

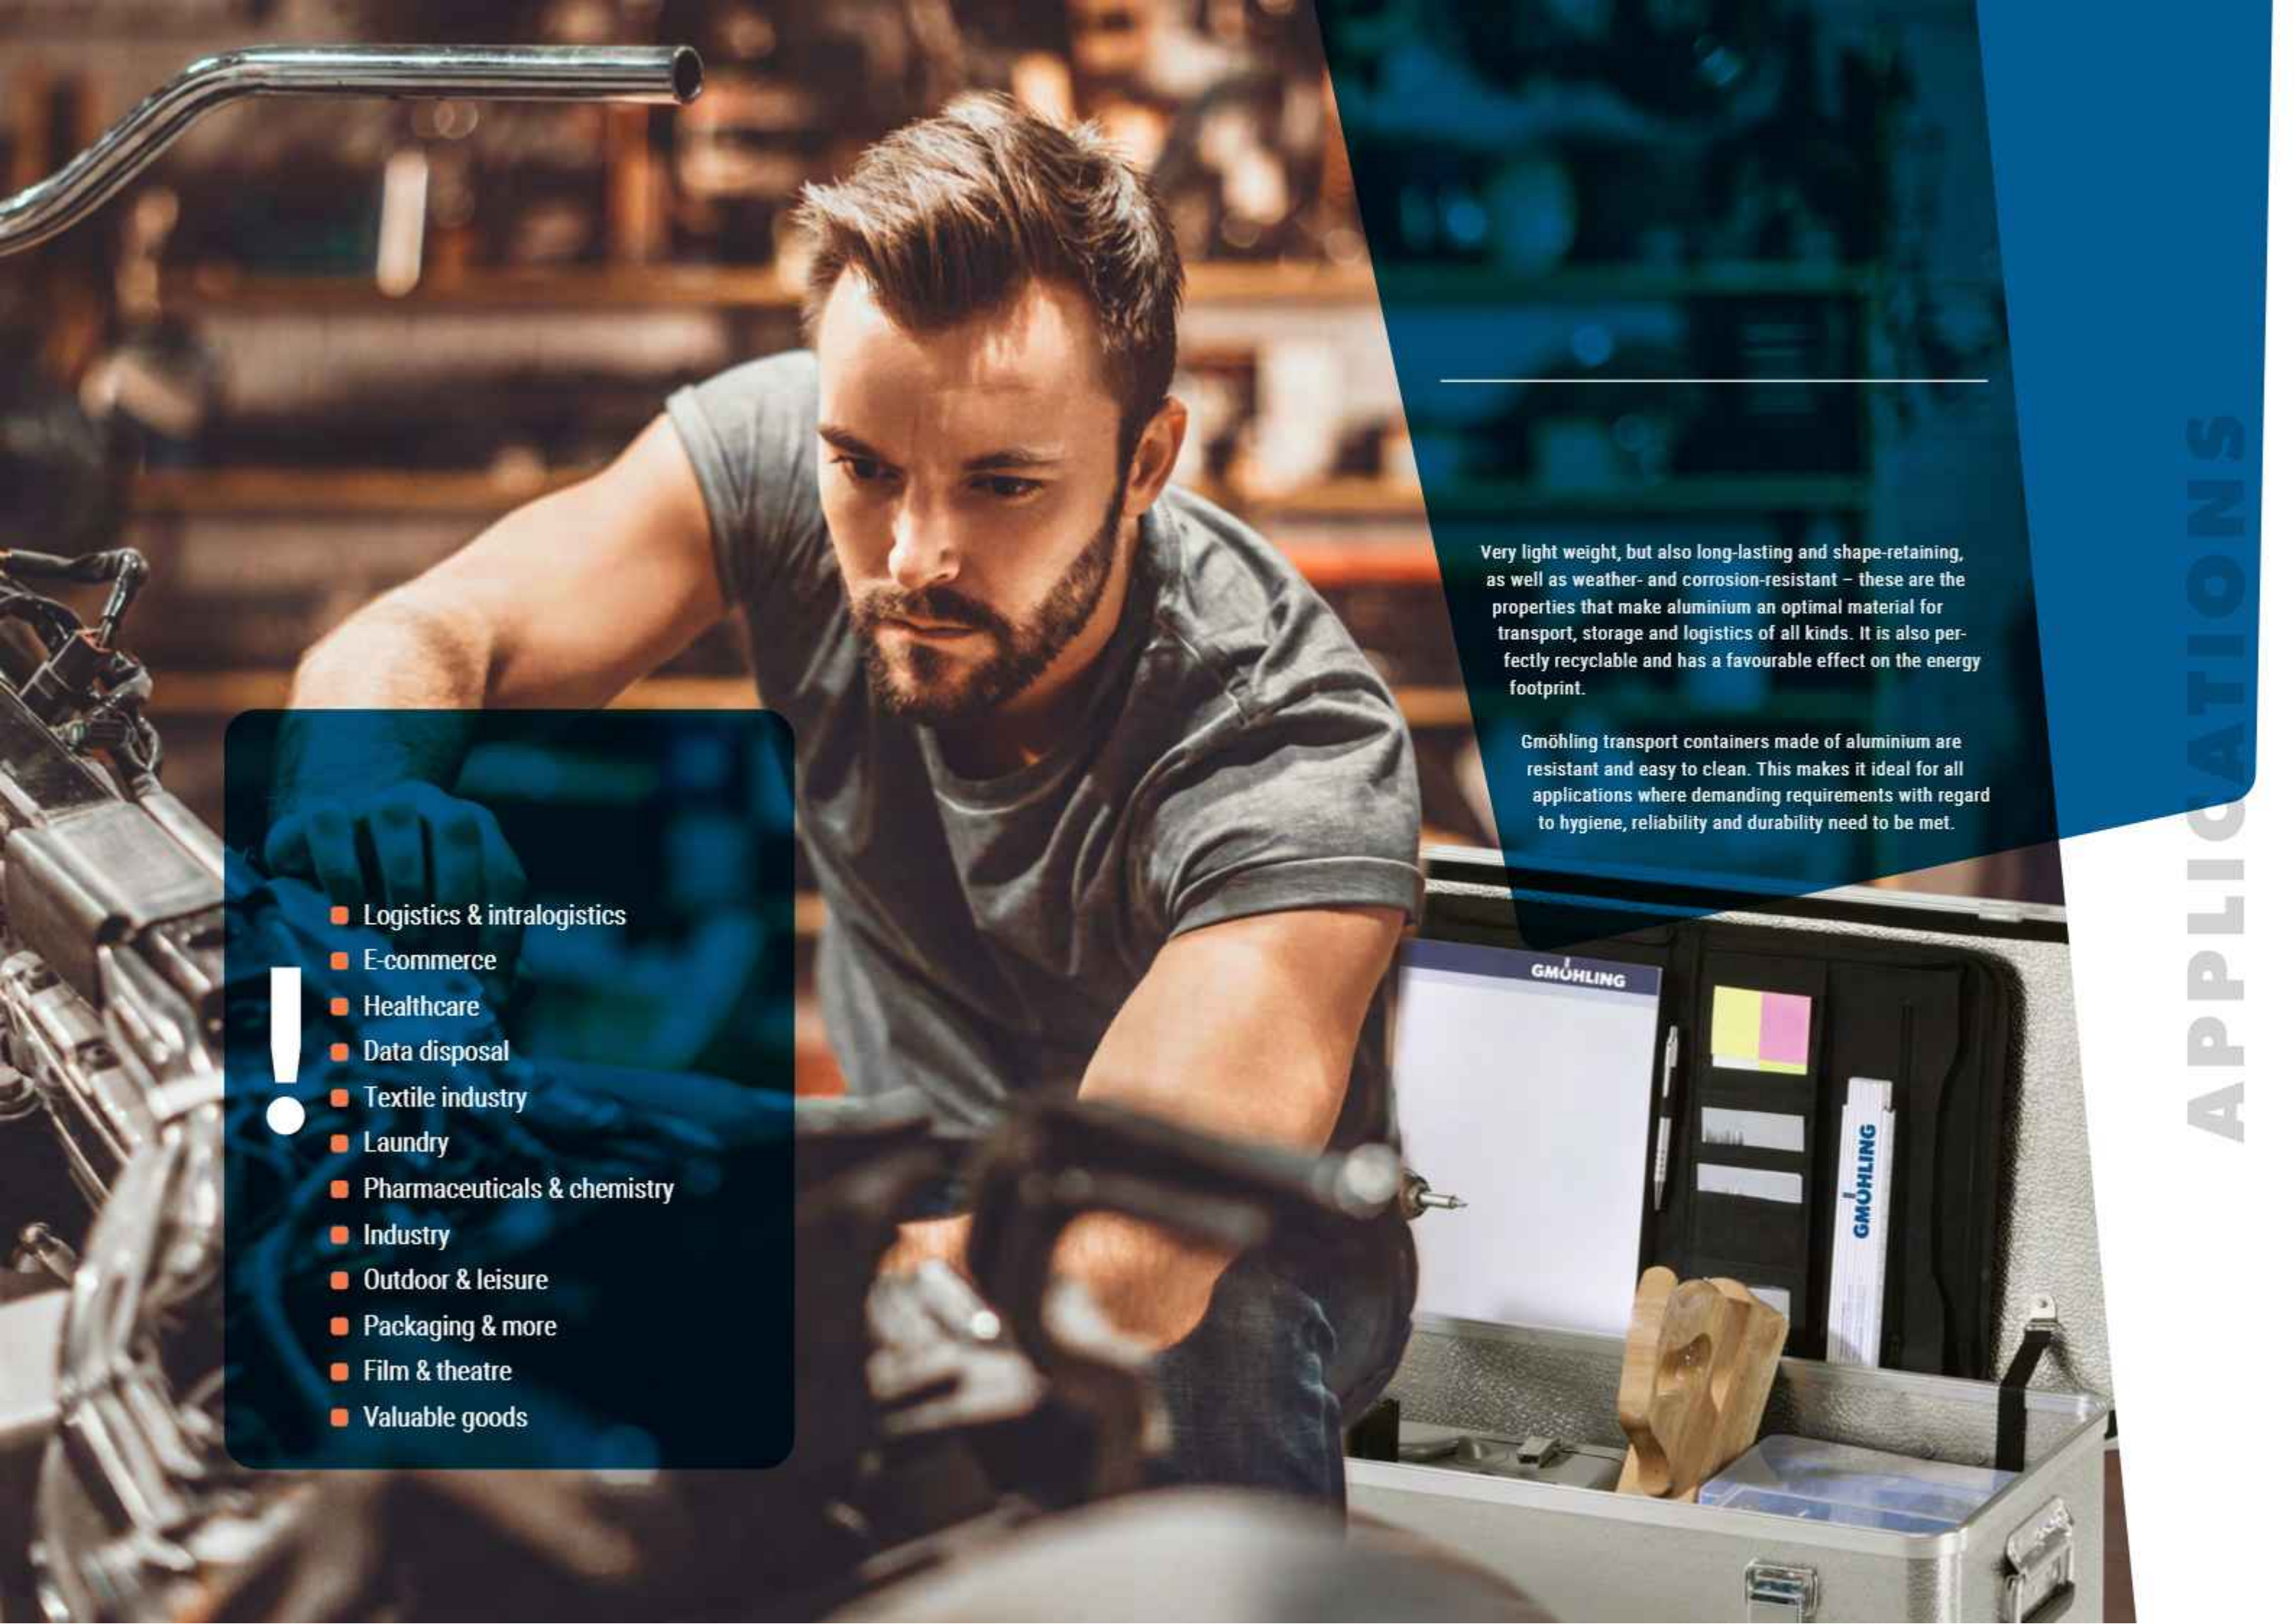

- 
- A man with a beard and short hair, wearing a grey t-shirt, is focused on working on a piece of machinery in a workshop. In the foreground, a silver GMÖHLING toolbox is open, showing its interior compartments, including a white clipboard with the GMÖHLING logo, a yellow and pink sticky note, and a wooden handle. The background is a blurred workshop with various tools and equipment.
- Logistics & intralogistics
  - E-commerce
  - Healthcare
  - Data disposal
  - Textile industry
  - Laundry
  - Pharmaceuticals & chemistry
  - Industry
  - Outdoor & leisure
  - Packaging & more
  - Film & theatre
  - Valuable goods

Very light weight, but also long-lasting and shape-retaining, as well as weather- and corrosion-resistant – these are the properties that make aluminium an optimal material for transport, storage and logistics of all kinds. It is also perfectly recyclable and has a favourable effect on the energy footprint.

Gmöhling transport containers made of aluminium are resistant and easy to clean. This makes it ideal for all applications where demanding requirements with regard to hygiene, reliability and durability need to be met.

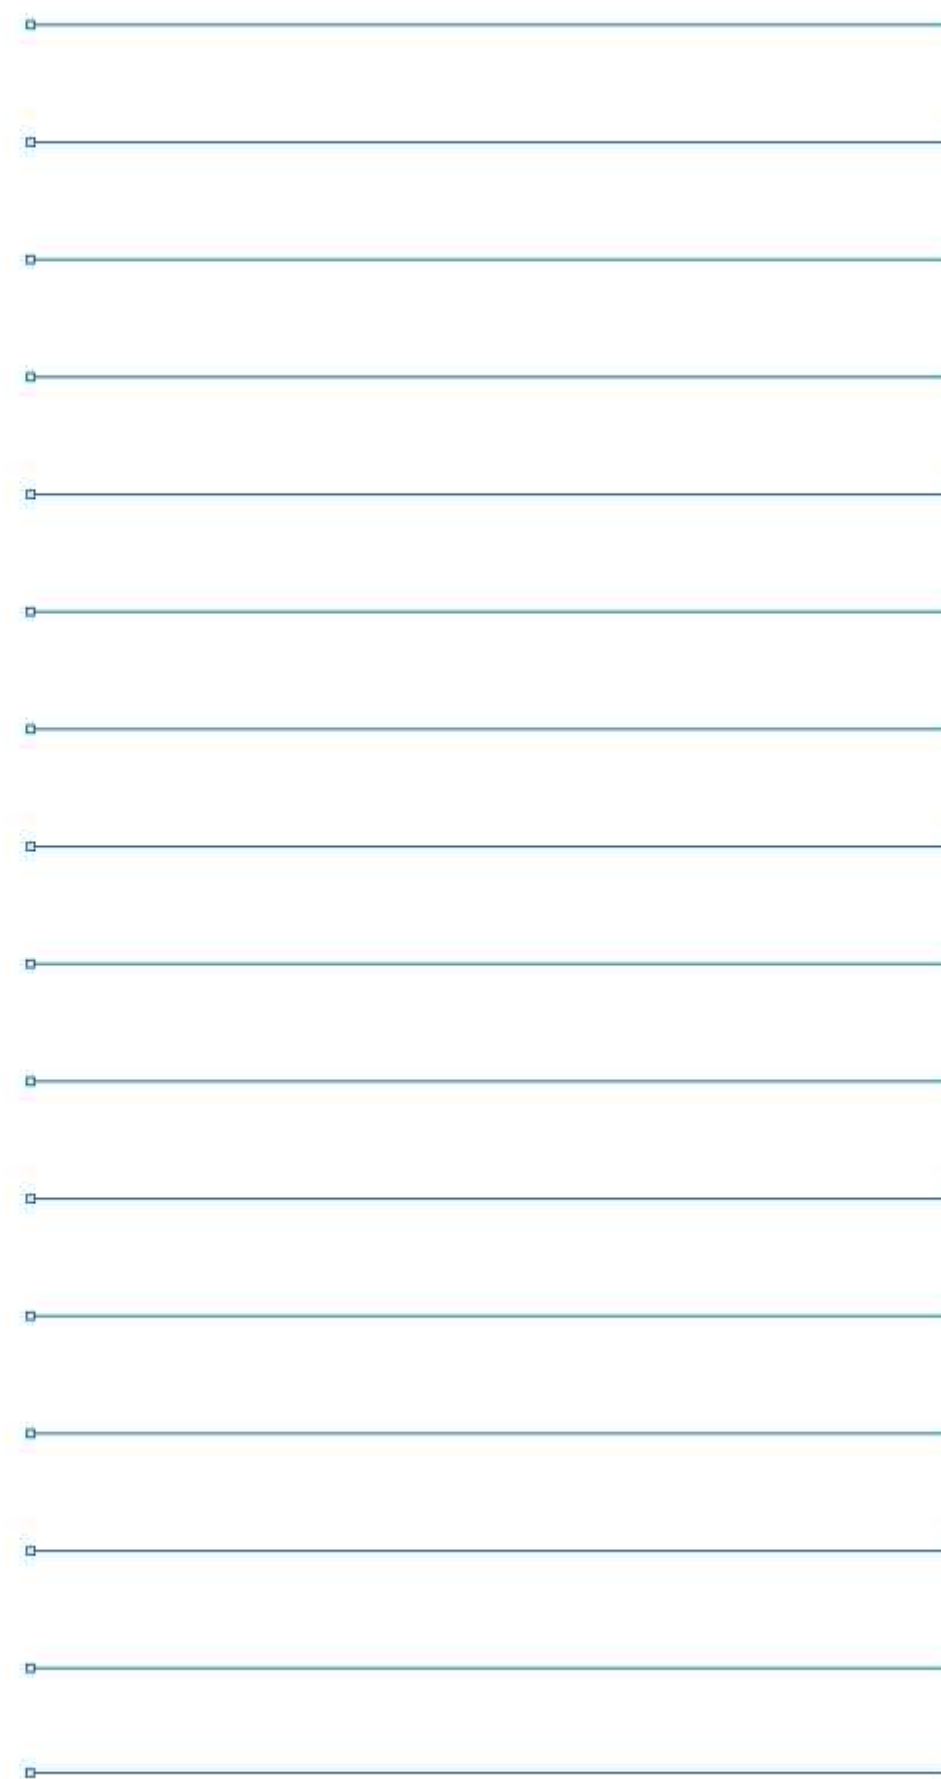



Lightweight and flexible



Electrically conductive



Stable, durable and dimensionally stable



Weatherproof and corrosion-resistant



Resistant to temperature fluctuations



Hygienic and odourless



Magnetically neutral



Easy recycling



The ideal material, very versatile



Atomic number: 13  
 Symbol: Al  
 Atomic mass: 26.981539  
 Melting point: 660.37°C  
 Boiling point: 2,470°C  
 Specific gravity: 2.6989 (20°C)  
 Value: 3  
 First produced:  
 1825 by the Danish scientist Hans Oersted



We are not just fascinated by the impressive appearance of this material, but rather by the physical and chemical properties of aluminium, the 13th element on our periodic table and one of the most common metals on Earth.

It is hard to imagine industry and households without aluminium products. Aluminium is indispensable, especially in the catering sector, the chemical and pharmaceutical industry, the aerospace sector and in service companies with high standards of hygiene, such as laundry facilities, hospitals and care homes. Aluminium containers are now standard in the logistics, transport and disposal sectors.

Since the company's early days, Gmöhling has chosen to use this brilliant material and manufactures aluminium containers in virtually all shapes and sizes for all industries on a daily basis.



WHY ALUMINIUM?

TRANSPORT TROLLEYS

SPRING-LOADED BASE TROLLEYS

CUPBOARD TROLLEYS

MODULAR CUPBOARD TROLLEYS

SHELF TROLLEYS

HAZARDOUS GOODS

BOXES

ROLLER BOXES

CRATES AND BASKETS

CONTAINER DOLLIES

TRANSPORT CASES

DATA DISPOSAL CONTAINERS

WASTE AND RECYCLABLES COLLECTING STATIONS

DISPOSAL CONTAINERS

BALLOT BOXES

SERVING TROLLEYS

## Maximum transport capacity

The versatile Gmöhling transport trolleys are available in different sizes and versions. Standard versions include trolleys with smooth, ribbed, perforated and anodised walls.

An essential feature of our transport trolleys is the cut side wall and the fold down or slide down front panel for ergonomic loading and unloading.

We offer various wheel systems according to the load weight to guarantee easier handling.

## Advantages of the G<sup>®</sup>-TRANS

- For universal use
- Hygienic, odourless and corrosion-resistant
- Robust and dimensionally stable with a low net weight
- Beading provides stability and rigidity
- Easy handling and ergonomic, even at maximum load
- Many versions with different load capacities
- Extremely stable design due to metal joints with the latest technologies
- Swivel castors with brakes in accordance with European standard EN 1757-3



## Transport trolley G®-TRANS D 3008



G®-TRANS  
D 3008/415 | Lid

- Smooth surface
- Closed trolley walls
- All-round, extremely stable rim profiles at the top and bottom ensure a durable trolley design
- Walls and aluminium profiles are interlocked by means of clinching, making them extremely stable
- Walls reinforced with all-round trapezoidal beading (rib)
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, non-marking solid rubber wheels, roller bearings and thread guards
- Wheel arrangement B, D or A



G®-TRANS  
D 3008/235



Wheel arrangement B:  
2 swivel castors with  
brakes and 2 fixed  
castors



Wheel arrangement D:  
4 swivel castors,  
2 of which have  
brakes



Wheel arrangement A:  
2 swivel castors and  
2 fixed castors, arranged  
in a rhomboidal  
position

| Model number                      | Wheel arrangement | Dimensions L x W x H (approx. mm) |                  | Volume (approx. l) | Wheel Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|-----------------------------------|-------------------|-----------------------------------|------------------|--------------------|--------------|----------------------------|---------------------|-----------|
|                                   |                   | internal                          | external         |                    |              |                            |                     |           |
| D 3008 / 235                      | B                 | 700 x 550 x 580                   | 730 x 580 x 740  | 223                | 100          | 200                        | 16                  | 020300801 |
| D 3008 / 235   lid                | B                 | 700 x 550 x 580                   | 760 x 605 x 745  | 223                | 100          | 200                        | 18.5                | 220300831 |
| D 3008 / 235                      | D                 | 700 x 550 x 580                   | 730 x 580 x 740  | 223                | 100          | 200                        | 16                  | 020300802 |
| D 3008 / 235   lid                | D                 | 700 x 550 x 580                   | 760 x 605 x 745  | 223                | 100          | 200                        | 18.5                | 220300833 |
| D 3008 / 240                      | B                 | 700 x 575 x 570                   | 730 x 605 x 730  | 229                | 100          | 200                        | 16                  | 020300803 |
| D 3008 / 240   lid                | B                 | 700 x 575 x 570                   | 760 x 630 x 735  | 229                | 100          | 200                        | 18.5                | 220300835 |
| D 3008 / 330                      | B                 | 960 x 550 x 610                   | 990 x 580 x 770  | 322                | 100          | 200                        | 18.5                | 020300804 |
| D 3008 / 330   lid                | B                 | 960 x 550 x 610                   | 1020 x 605 x 775 | 322                | 100          | 200                        | 22                  | 220300837 |
| D 3008 / 330                      | D                 | 960 x 550 x 610                   | 990 x 580 x 770  | 322                | 100          | 200                        | 18.5                | 020300805 |
| D 3008 / 330   lid                | D                 | 960 x 550 x 610                   | 1020 x 605 x 775 | 322                | 100          | 200                        | 22                  | 220300839 |
| D 3008 / 415                      | A                 | 1000 x 640 x 650                  | 1030 x 670 x 845 | 415                | 125          | 150                        | 22                  | 020300806 |
| D 3008 / 415   lid                | A                 | 1000 x 640 x 650                  | 1060 x 695 x 850 | 415                | 125          | 150                        | 26                  | 220300846 |
| D 3008 / 415                      | B                 | 1000 x 640 x 650                  | 1030 x 670 x 835 | 415                | 125          | 250                        | 22                  | 020300807 |
| D 3008 / 415   lid                | B                 | 1000 x 640 x 650                  | 1060 x 695 x 840 | 415                | 125          | 250                        | 26                  | 220300841 |
| D 3008 / 430 P                    | B                 | 1100 x 600 x 650                  | 1130 x 630 x 835 | 430                | 125          | 200                        | 20                  | 020300812 |
| D 3008 / 570                      | B                 | 1250 x 650 x 685                  | 1280 x 680 x 870 | 560                | 125          | 250                        | 25                  | 020300809 |
| D 3008 / 570   lid                | B                 | 1250 x 650 x 685                  | 1310 x 705 x 875 | 560                | 125          | 250                        | 31                  | 220300843 |
| D 3008 / 656                      | B                 | 1250 x 700 x 750                  | 1280 x 730 x 935 | 656                | 125          | 250                        | 26.5                | 020300811 |
| D 3008 / 656   lid                | B                 | 1250 x 700 x 750                  | 1310 x 755 x 940 | 656                | 125          | 250                        | 32.5                | 220300845 |
| Cylinder lock for toggle fastener |                   |                                   |                  |                    |              |                            |                     | 045031001 |



## Transport trolley G®-TRANS D 3008/240

- Structured, scratch-resistant surface



## Transport trolley G®-TRANS D 3008/430 P

- Perforated walls and base, 10 mm Ø hole, 22.5 x 22.5 mm hole spacing
- Stable undercarriage support made of aluminium

## Transport trolley G®-TRANS D 1008



G®-TRANS  
D 1008/230 E

- Smooth and anodised surface
- Closed trolley walls
- All-round, extremely stable rim profiles at the top and bottom ensure a durable trolley design
- Walls and aluminium profiles are interlocked by means of clinching, making them extremely stable
- Without beading
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, non-marking solid rubber wheels, roller bearings and thread guards
- Wheel arrangement D or A



Wheel arrangement D:  
4 swivel castors,  
2 of which have brakes



Wheel arrangement A:  
2 swivel castors and 2  
fixed castors, arranged in  
a rhomboidal position

| Model number   | Wheel arrangement | Dimensions L x W x H (approx. mm) |                  | Volume (approx. l) | Wheel Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|----------------|-------------------|-----------------------------------|------------------|--------------------|--------------|----------------------------|---------------------|-----------|
|                |                   | internal                          | external         |                    |              |                            |                     |           |
| D 1008 / 230 E | D                 | 700 x 550 x 600                   | 730 x 580 x 760  | 230                | 100          | 200                        | 18                  | 020100807 |
| D 1008 / 525 E | A                 | 1250 x 700 x 600                  | 1280 x 730 x 795 | 525                | 125          | 150                        | 29                  | 020100809 |

## TIP



Anodised surface for even better protection against corrosion and abrasion



## Transport trolley G®-TRANS D 1008/525 E

- Wheel arrangement A

G®-TRANS  
D 1008/525 E



G®-TRANS  
D 1008/230 E

## Transport trolley G®-TRANS D 3508

- Foldable front panel: top half down
- Smooth surface
- Walls and aluminium profiles are interlocked by means of clinching, making them extremely stable
- Walls and fold down front panel reinforced with all-round trapezoidal beading (rib)
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, non-marking solid rubber wheels, roller bearings and thread guards
- Wheel arrangement B



Wheel arrangement B:  
2 swivel castors with  
brakes and 2 fixed  
castors



G®-TRANS  
D 3508/360 | Lid



G®-TRANS  
D 3508/1050 | Lid

G®-TRANS  
D 3508/360



## Transport trolley G®-TRANS D 3708

- With slide down front panel
- Slide down front panel and front without beading



## Transport trolley G®-TRANS D 3808

- With cut side wall, approx. 1130 x 250 mm
- Anodised handles on both short sides

| Model number                      | Wheel arrangement | Dimensions L x W x H (approx. mm) |                   | Volume (approx. l) | Wheel-Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|-----------------------------------|-------------------|-----------------------------------|-------------------|--------------------|--------------|----------------------------|---------------------|-----------|
|                                   |                   | internal                          | external          |                    |              |                            |                     |           |
| D 3508 / 360                      | B                 | 900 x 500 x 800                   | 930 x 530 x 985   | 355                | 125          | 250                        | 22.5                | 020350801 |
| D 3508 / 360   lid                | B                 | 900 x 500 x 800                   | 960 x 555 x 990   | 355                | 125          | 250                        | 25.5                | 220350831 |
| D 3508 / 1050                     | B                 | 1250 x 700 x 1200                 | 1280 x 730 x 1430 | 1050               | 160          | 300                        | 40                  | 020350802 |
| D 3508 / 1050   lid               | B                 | 1250 x 700 x 1200                 | 1310 x 755 x 1435 | 1050               | 160          | 300                        | 46                  | 220350834 |
| D 3708 / 360                      | B                 | 900 x 495 x 800                   | 930 x 525 x 985   | 355                | 125          | 250                        | 24                  | 020370801 |
| D 3708 / 360   lid                | B                 | 900 x 495 x 800                   | 960 x 550 x 990   | 355                | 125          | 250                        | 27                  | 220370831 |
| D 3708 / 650                      | B                 | 1250 x 645 x 800                  | 1280 x 675 x 985  | 650                | 125          | 250                        | 31                  | 020370802 |
| D 3708 / 650   lid                | B                 | 1250 x 645 x 800                  | 1310 x 700 x 990  | 650                | 125          | 250                        | 37                  | 220370833 |
| D 3808 / 945                      | B                 | 1500 x 900 x 700                  | 1680 x 930 x 970  | 945                | 200          | 300                        | 44                  | 020380801 |
| Cylinder lock for toggle fastener |                   |                                   |                   |                    |              |                            |                     | 045031001 |

## TIP



- Ergonomic work through easier loading and unloading
- Handles on the G®-TRANS D 3808 model enable easy handling at maximum load
- Ideal when space is tight

## Transport trolley G®-TRANS D 1508



G®-TRANS  
D 1508/360 SCU

- Foldable front panel; top half down
- Hinged lid, 2 retaining straps and 2 toggle fasteners
- Smooth surface
- Walls and aluminium profiles are interlocked by means of clinching, making them extremely stable
- Walls without beading, making them particularly easy to clean
- Open flap is held by 2 magnets
- Anodised handles on both short sides
- Base with down-grade and 2 drain holes
- Both drain holes with drain valve, plug and chain
- Base sealed with silicone
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, thermoplastic rubber tread, grey and non-marking, precision ball bearings
- Wheel arrangement B



Wheel arrangement B:  
2 swivel castors with  
brakes and 2 fixed  
castors



G®-TRANS  
D 1508/360 SCU | PVC



G®-TRANS  
D 1539/690 SCU | PVC

## Transport trolley G®-TRANS D 1539

- With a front panel, up to 2/3 of which can be folded down
- 2-part lid with 2 straps and 2 toggle fasteners
- Galvanised steel wheel housing, wheel centre made of polypropylene (Supratech), thermoplastic rubber tread, grey and non-marking, precision ball bearings



2-part lid for easy and safe  
work



Extremely low fold down front  
panel for easy loading and  
unloading



Drain holes with drain valve,  
plug and chain

## TIP

- Also with an all-round, flexible and abrasion-resistant PVC bumper on the lower rim of the trolley, protects the trolley, walls and doors
- Extremely low fold down front panel for easy loading and unloading
- 2-part hinged lid for easy and safe work
- Handles enable easy handling at maximum load
- Very quiet and low contact resistance

| Model number                      | Wheel arrangement | Dimensions L x W x H (approx. mm) |                   | Volume (approx. l) | Wheel-Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|-----------------------------------|-------------------|-----------------------------------|-------------------|--------------------|--------------|----------------------------|---------------------|-----------|
|                                   |                   | internal                          | external          |                    |              |                            |                     |           |
| D 1508 / 360 SCU                  | B                 | 900 x 500 x 800                   | 970 x 560 x 1005  | 360                | 125          | 200                        | 26                  | 020150823 |
| D 1508 / 360 SCU   PVC            | B                 | 900 x 500 x 800                   | 990 x 590 x 1005  | 360                | 125          | 200                        | 30                  | 220150823 |
| D 1539 / 690 SCU                  | B                 | 1000 x 575 x 1200                 | 1070 x 635 x 1475 | 690                | 200          | 300                        | 40                  | 020153913 |
| D 1539 / 690 SCU   PVC            | B                 | 1000 x 575 x 1200                 | 1090 x 665 x 1475 | 690                | 200          | 300                        | 44                  | 220153913 |
| D 1539 / 1050 SCU                 | B                 | 1250 x 700 x 1200                 | 1320 x 760 x 1475 | 1050               | 200          | 300                        | 52                  | 020153914 |
| D 1539 / 1050 SCU   PVC           | B                 | 1250 x 700 x 1200                 | 1340 x 790 x 1475 | 1050               | 200          | 300                        | 57                  | 220153914 |
| Cylinder lock for toggle fastener |                   |                                   |                   |                    |              |                            |                     | 045031001 |



## Options for the Transport trolley G®-TRANS:



- WHY ALUMINIUM?
- TRANSPORT TROLLEYS
- SPRING-LOADED BASE TROLLEYS
- CUPBOARD TROLLEYS
- MODULAR CUPBOARD TROLLEYS
- SHELF TROLLEYS
- HAZARDOUS GOODS
- BOXES
- ROLLER BOXES
- CRATES AND BASKETS
- CONTAINER DOLLIES
- TRANSPORT CASES
- DATA DISPOSAL CONTAINERS
- WASTE AND RECYCLABLES COLLECTING STATIONS
- DISPOSAL CONTAINERS
- BALLOT BOXES
- SERVING TROLLEYS



|                                           |
|-------------------------------------------|
| WHY ALUMINIUM?                            |
| TRANSPORT TROLLEYS                        |
| SPRING-LOADED BASE TROLLEYS               |
| CUPBOARD TROLLEYS                         |
| MODULAR CUPBOARD TROLLEYS                 |
| SHELF TROLLEYS                            |
| HAZARDOUS GOODS                           |
| BOXES                                     |
| ROLLER BOXES                              |
| CRATES AND BASKETS                        |
| CONTAINER DOLLIES                         |
| TRANSPORT CASES                           |
| DATA DISPOSAL CONTAINERS                  |
| WASTE AND RECYCLABLES COLLECTING STATIONS |
| DISPOSAL CONTAINERS                       |
| BALLOT BOXES                              |
| SERVING TROLLEYS                          |



## Light and ergonomic work

### TIP



## Advantages of the G<sup>®</sup>-ERGO

- 
- 
- 
- 
- 
- 
- 
- 



|                                           |
|-------------------------------------------|
| WHY ALUMINIUM?                            |
| TRANSPORT TROLLEYS                        |
| SPRING-LOADED BASE TROLLEYS               |
| CUPBOARD TROLLEYS                         |
| MODULAR CUPBOARD TROLLEYS                 |
| SHELF TROLLEYS                            |
| HAZARDOUS GOODS                           |
| BOXES                                     |
| ROLLER BOXES                              |
| CRATES AND BASKETS                        |
| CONTAINER DOLLIES                         |
| TRANSPORT CASES                           |
| DATA DISPOSAL CONTAINERS                  |
| WASTE AND RECYCLABLES COLLECTING STATIONS |
| DISPOSAL CONTAINERS                       |
| BALLOT BOXES                              |
| SERVING TROLLEYS                          |

## Spring-loaded base trolley G®-ERGO vario D 1408



- Smooth and anodised surface
- Walls and aluminium profiles are interlocked by means of clinching, making them extremely stable
- Smooth side walls reduce the friction of the load; the spring-loaded trolley reacts immediately to any change in weight
- All-round, extremely stable profiles at the top and bottom on the rims of the trolley
- All-round, flexible and abrasion-resistant PVC bumper on the upper rim of the trolley
- Parallel and torsion-free guidance of the drop-down floor by means of 8 covered ball bearings, even with one-sided loading
- Constant loading and unloading height; the weight of the load allows the base to continuously drop down. The base rises slowly when the trolley is unloaded
- G®-ERGO libra: The load-dependent lowerable floor of the trolley is also equipped with an electronic scale (not calibrated and therefore not suitable for the sell of product per weight)
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, non-marking solid rubber wheels, roller bearings and thread guards
- Wheel arrangement B, D or A



Wheel arrangement B:  
2 swivel castors with  
brakes and  
2 fixed castors



Wheel arrangement D:  
4 swivel castors, 2 of  
which have brakes



Wheel arrangement A:  
2 swivel castors and 2  
fixed castors, arranged  
in a rhomboidal  
position



G®-ERGO vario  
D 1408/350  
Transparent  
version shown



G®-ERGO vario  
D 1408/350  
with tension springs



G®-ERGO libra  
D 1408/350  
with scale

| Model number      | Wheel arrangement | Dimensions L x W x H (approx. mm) |                  | Volume (approx. l) | Wheel-Ø (mm) | Spring force (approx. kg) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|-------------------|-------------------|-----------------------------------|------------------|--------------------|--------------|---------------------------|----------------------------|---------------------|-----------|
|                   |                   | internal                          | external         |                    |              |                           |                            |                     |           |
| D 1408 / 180      | D                 | 740 x 510 x 485                   | 855 x 550 x 760  | 180                | 125          | 50                        | 130                        | 34                  | 022140808 |
| D 1408 / 350      | B                 | 1000 x 650 x 580                  | 1115 x 690 x 855 | 380                | 125          | 70                        | 130                        | 44                  | 022140802 |
| D 1408 / 350      | D                 | 1000 x 650 x 580                  | 1115 x 690 x 855 | 380                | 125          | 25                        | 130                        | 42                  | 222140803 |
| D 1408 / 350 A SC | A                 | 1000 x 650 x 580                  | 1115 x 690 x 855 | 380                | 125          | 50                        | 130                        | 44                  | 022140811 |
| D 5408 / 580      | B                 | 1400 x 700 x 620                  | 1515 x 740 x 895 | 615                | 125          | 70                        | 130                        | 55                  | 022540801 |
| D 5408 / 580 A SC | A                 | 1400 x 700 x 620                  | 1515 x 740 x 905 | 615                | 125          | 50                        | 130                        | 51                  | 022540812 |
| D 1408 / 350      | B                 | 1000 x 650 x 530                  | 1115 x 690 x 945 | 340                | 125          | 50                        | 130                        | 54                  | 222140824 |
| D 1408 / 350      | B                 | 1000 x 650 x 530                  | 1115 x 690 x 945 | 340                | 125          | 70                        | 130                        | 54                  | 222140825 |
| D 5408 / 580      | B                 | 1400 x 700 x 570                  | 1515 x 740 x 995 | 560                | 125          | 50                        | 130                        | 65                  | 222540809 |
| D 5408 / 580      | B                 | 1400 x 700 x 570                  | 1515 x 740 x 995 | 560                | 125          | 70                        | 130                        | 65                  | 222540810 |

## Spring-loaded base trolley G®-ERGO vario D 1408/350 A SC



- Wheel arrangement A: 2 swivel and 2 fixed castors, arranged in a rhomboidal position
- Wheels with a thermoplastic rubber tread, non-marking, precision ball bearings



## Spring-loaded base trolley G®-ERGO vario D 5408/580

- Wheel arrangement B: 2 swivel castors with brakes and 2 fixed castors
- Non-anodised surface



## Spring-loaded base trolley G®-ERGO vario D 5408/580 A SC

- Wheel arrangement A: 2 swivel and 2 fixed castors, arranged in a rhomboidal position
- Wheels with a thermoplastic rubber tread, non-marking, precision ball bearings

## Spring-loaded base trolley G®-ERGO classic D 1408



G®-ERGO classic  
D 1408/180

- Smooth and anodised surface
- Walls and aluminium profiles are interlocked by means of clinching, making them extremely stable
- Smooth side walls reduce the friction of the load; the spring-loaded base trolley reacts immediately to any change in weight
- All-round, extremely stable profiles at the top and bottom on the rims of the trolley
- Parallel and torsion-free guidance of the drop-down floor by means of 8 covered ball bearings, even with one-sided loading
- Constant loading and unloading height; the weight of the load allows the base to continuously drop down. The base rises slowly when the trolley is unloaded
- Spring force: 25 kg
- Modification of the spring force and undercarriage is not possible
- No option available
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, non-marking solid rubber wheels, roller bearings and thread guards
- Wheel arrangement D



Wheel arrangement D:  
4 swivel castors



G®-ERGO classic  
D 1408/350  
Transparent version shown

| Model number | Wheel arrangement | Dimensions L x W x H (approx. mm) |                  | Volume (approx. l) | Wheel - Ø (mm) | Spring force (approx. kg) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|--------------|-------------------|-----------------------------------|------------------|--------------------|----------------|---------------------------|----------------------------|---------------------|-----------|
|              |                   | internal                          | external         |                    |                |                           |                            |                     |           |
| D 1408 / 180 | D                 | 740 x 510 x 485                   | 845 x 540 x 760  | 180                | 125            | 25                        | 100                        | 26                  | 022140807 |
| D 1408 / 350 | D                 | 1000 x 650 x 580                  | 1105 x 680 x 855 | 380                | 125            | 25                        | 100                        | 33                  | 022140805 |

## TIP



Very good price-performance ratio with the excellent Gmöhling quality



## Spring-loaded base trolley G®-ERGO classic D 1408/350

- Volume: 380 l



G®-ERGO classic  
D 1408/350

G®-ERGO classic  
D 1408/180

## Aluminium spring-loaded base trolleys

The Gmöhling spring-loaded base trolley is indispensable in hospital and laundry logistics, in retirement homes, in libraries, in the automotive industry, in intralogistics etc.



Vario Libra: Scale



Vario version with tension springs for easy adjustment of the spring force



Swivel castor with brake

### Options for the spring-loaded base trolley G®-ERGO vario:

#### TIP



These options are available with an order quantity of just 5 units



Brushes on a spring-loaded base



Inlay with plastic rim for a lower gap



Compartments



Handle



Handle with synthetic covering



Inlying handle



Undercarriage changes (wheel diameter, wheel arrangement, tyres)



Special sizes and accessories for picking



Lid



|                                           |
|-------------------------------------------|
| WHY ALUMINIUM?                            |
| TRANSPORT TROLLEYS                        |
| SPRING-LOADED BASE TROLLEYS               |
| CUPBOARD TROLLEYS                         |
| MODULAR CUPBOARD TROLLEYS                 |
| SHELF TROLLEYS                            |
| HAZARDOUS GOODS                           |
| BOXES                                     |
| ROLLER BOXES                              |
| CRATES AND BASKETS                        |
| CONTAINER DOLLIES                         |
| TRANSPORT CASES                           |
| DATA DISPOSAL CONTAINERS                  |
| WASTE AND RECYCLABLES COLLECTING STATIONS |
| DISPOSAL CONTAINERS                       |
| BALLOT BOXES                              |
| SERVING TROLLEYS                          |

## Spring-loaded base trolley G®-ERGO flex

Material: anodised aluminium



G®-ERGO flex D 1408  
with fifth wheel, handle  
and PVC bumper

- Smooth and anodised surface
- The spring force can be adjusted individually depending on the weight of the goods
- A flexible modulation of the spring force is possible at any time, this without tools nor major retrofit
- Intuitive handling
- Constant loading and unloading height even with goods of different weights
- Unique on the picking trolley market
- Patented technology
- Individual in size, spring force and other features
- The spring force can easily be adjusted by gently lifting the handle upwards and then sliding it
- Steplessly adjustable at any time before loading
- Spring-force from approx. 20 kg with a continuously adjustable setting range of approx. 50 kg



## TIP



This spring-loaded base trolley is only available on request. That's why we can respond individually to your requirements and needs!

From the required spring force & size of the trolley to features such as handles, ladders, bumpers and wheels - whatever you can imagine is possible!

## Steplessly adjustable spring force

Patented technology made by Gmöhling



G®-ERGO flex

## Cupboard trolleys in all versions

The Gmöhling cupboard trolley can do it all, regardless of where it is used. It has proven its reliability as a transport and storage trolley for dirty and fresh laundry and as a food trolley in the day-to-day work of hospitals and care homes all around the world. The cupboard trolley is used for the transport of sterilised materials and as medicine trolley.

The areas of use are extremely diverse, whether as an in-house tool trolley, a costume trolley for the theatre, opera, films and shows, a mobile office or for use in schools and public institutions.

The all-rounder - a thoughtful design down to the very last detail!

### Advantages of the G®-CUP

- Anodisation protects against abrasion and corrosion
- Long service life due to high-quality workmanship
- High degree of stability with a low net weight
- Dustproof and splashproof
- Easy handling and ergonomic, even at maximum load
- Various internal and external trolley configuration available
- Swivel castors with brakes in accordance with European standard EN 1757-3



## Cupboard trolley G®-CUP E 272

- Anodised surface
- Walls and aluminium profiles are interlocked by means of clinching, making them extremely stable
- Open cupboard side with an all-round profile frame



G®-CUP  
E 2721

- Two extremely rigid hinged doors, 3.0 mm thick, can be rotated through 270 degrees
- Open doors are secured by magnets
- Easy to use, one-handed, central twist lock ensures safely locked doors, even during transport by truck
- Good noise insulation and dust protection due to the all-round EPDM seal integrated onto the doors as well as the base and top profile
- Smooth interior with no indentations for easy handling and cleaning
- Ergonomic push/pull handles on both short sides
- All-round, abrasion-resistant, blue PVC bumper on the top and lower rim of the trolley
- 2 removable shelves create 3 evenly spaced storage compartments, each shelf can be loaded up to 100 kg equally distributed
- DIN A4 document frame on the inside of the door and DIN A7 on the short side of the trolley
- Torsion-resistant trolley undercarriage due to the BiTubAl® system
- Galvanised steel wheel housing, Supratech wheels, 200 mm wheel, polypropylene wheel centre, thermoplastic rubber tread, non-marking, precision ball bearings
- Wheel arrangement B



Wheel arrangement B:  
2 swivel castors with  
brakes and  
2 fixed castors



G®-CUP  
E 2724



## Cupboard trolley G®-CUP E 2723

- 1 shelf

### TIP



- The Supratech wheels have a very low contact resistance and offer very smooth operation
- Very low running noise with low wear

| Model number | Wheel arrangement | Dimensions L x W x H (approx. mm) |                   | Volume (approx. l) | Number of compartments | Compartment height (approx. mm) | Wheel Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|--------------|-------------------|-----------------------------------|-------------------|--------------------|------------------------|---------------------------------|--------------|----------------------------|---------------------|-----------|
|              |                   | internal                          | external          |                    |                        |                                 |              |                            |                     |           |
| E 2721       | B                 | 1320 x 600 x 1220                 | 1410 x 690 x 1596 | 970                | 3                      | 390                             | 200          | 300                        | 80                  | 024272121 |
| E 2722       | B                 | 1130 x 550 x 1430                 | 1220 x 640 x 1806 | 890                | 3                      | 460                             | 200          | 300                        | 77                  | 024272222 |
| E 2723       | B                 | 1130 x 550 x 1030                 | 1220 x 640 x 1406 | 640                | 2                      | 500                             | 200          | 300                        | 63                  | 024272323 |
| E 2724       | B                 | 1130 x 520 x 1430                 | 1220 x 610 x 1806 | 840                | 3                      | 460                             | 200          | 300                        | 75.5                | 024272424 |
| E 2725       | B                 | 750 x 550 x 1430                  | 840 x 640 x 1806  | 590                | 3                      | 460                             | 200          | 300                        | 61                  | 024272525 |
| E 2726       | B                 | 1255 x 600 x 1430                 | 1345 x 690 x 1806 | 1080               | 3                      | 460                             | 200          | 300                        | 84                  | 024272626 |

## G®-CUP E 272 – perfection down to the very last detail



G®-CUP  
E 2724

- Removable, fixed on request
- Every shelf can be fully loaded up to 100 kg
- Smooth, easy to clean

- High rigidity due to the profiles
- Can be rotated through 270 degrees
- 3 mm thickness



- New integrated EPDM seal (tongue and groove system - also ideal for automatic washing facilities)



- Replaceable, elastic blue PVC bumper on the top and base of the trolley
- Top edging to secure the storage of small parts



- DIN A4 size inside on the right door
- DIN A7 size outside on the right short side



- Easy to use, centrally operated
- Contact pressure against the door frame seal
- Easy and secure locking, even in the case of overfilling
- Doors do not spring open during transport by truck



- Made of polyamide



- Continuously from top to bottom
- Maintenance-free and silent due to the Teflon-coated hinge pins



- Optimum torsional stiffness
- High degree of stability due to the BiTubAl® frame (two tubular system profiles connected to the trolley undercarriage)
- Adjustable wheel positions
- Smooth running, even when trolleys are towed in train



- Ergonomic handles in 2 versions
- Combined push/pull handle on both short sides
- Easy push handle
- Pull handle ensures maximum safety at work




- For securing the open doors on both short sides



- 2 swivel castors with brakes and 2 fixed castors
- Supratech wheels, 200 mm diameter wheel, precision ball bearings, thermoplastic rubber tread, non-marking
- Many optional alternatives (e.g. for use in sterile areas)
- Adaptable for AGV
- Wheel positions can be adjusted



Options for the  
cupboard trolley  
G®-CUP:

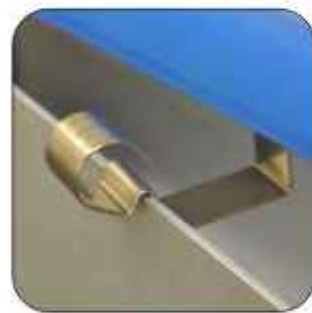

- WHY ALUMINIUM?
- TRANSPORT TROLLEYS
- SPRING-LOADED BASE TROLLEYS
- CUPBOARD TROLLEYS
- MODULAR CUPBOARD TROLLEYS
- SHELF TROLLEYS
- HAZARDOUS GOODS
- BOXES
- ROLLER BOXES
- CRATES AND BASKETS
- CONTAINER DOLLIES
- TRANSPORT CASES
- DATA DISPOSAL CONTAINERS
- WASTE AND RECYCLABLES COLLECTING STATIONS
- DISPOSAL CONTAINERS
- BALLOT BOXES
- SERVING TROLLEYS

## Open cupboard trolley G®-CUP light E 2601



G®-CUP light  
E 2601/1

- Anodised surface
- Without doors for quick access and to save space
- Smooth interior with no indentations for easy cleaning and handling
- Ergonomic push/pull handle on both short sides
- All-round, abrasion-resistant, blue PVC bumper on the lower rim of the trolley
- 2 fixed shelves create 3 evenly spaced storage compartments, each shelf can be loaded up to 100 kg equally distributed
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, non-marking solid rubber wheels, 160 mm wheel, polypropylene wheel centre, roller bearings and thread guards
- Wheel arrangement D



Wheel arrangement D:  
4 swivel castors, 2 of  
which have brakes



G®-CUP  
E 2601/2



## Open cupboard trolley G®-CUP light E 2601/3

- 3 fixed shelves create 4 evenly spaced storage compartments

## TIP



- Ideal when space is tight
- An optimum overview and direct access to the contents
- You can find more options on page 39

| Model number | Wheel arrangement | Dimensions L x W x H (approx. mm) |                   | Volume (approx. l) | Number of compartments | Compartment height (approx. mm) | Wheel Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|--------------|-------------------|-----------------------------------|-------------------|--------------------|------------------------|---------------------------------|--------------|----------------------------|---------------------|-----------|
|              |                   | interior                          | external          |                    |                        |                                 |              |                            |                     |           |
| E 2601/1     | D                 | 870 x 460 x 1160                  | 960 x 500 x 1460  | 460                | 3                      | 370                             | 160          | 300                        | 35                  | 023260101 |
| E 2601/2     | D                 | 1180 x 540 x 1160                 | 1270 x 580 x 1460 | 740                | 3                      | 370                             | 160          | 300                        | 41.5                | 023260102 |
| E 2601/3     | D                 | 1180 x 540 x 1330                 | 1270 x 580 x 1630 | 850                | 4                      | 310                             | 160          | 300                        | 47                  | 023260103 |



Gmöhling cupboard trolleys have been used productively and proven successful for decades in hospitals, care homes, laundry facilities, industry and also in the service sector all around the world. They simplify the logistics, reduce costs and make work easier for the employees. Thanks to our many years of experience and flexibility, we realise special solutions to suit your individual requirements.

We design and optimise your supply chain solutions.



Costume trolley for film and theatre



Cupboard trolley with drawers and lid



Cupboard trolley with hanging rail and shelves



Kitting rack for electronic components



Cupboard trolley with swing down shelves and drop grid



Cupboard trolley for sterilising in autoclaves, on a container dolly



Cupboard trolley with drawers and crane lugs

## Variable configuration

### Advantages of the G®-CUP ISO E 273

- 
- 
- 
- 
- 
- 



## Modular cupboard trolley G®-CUP ISO E 273

- Anodised surface
- With 1, 2 or 3 rows of modules
- Each compartment contains 9 pairs of height-adjustable, antibacterial plastic rails and can be extended up to 18 pairs
- Internal design - vertical pillars and rails - completely removable if required, suitable for all components of the 400 x 600 mm or 400 x 300 mm ISO modular system
- Walls and aluminium profiles are interlocked by means of clinching, making them extremely stable
- High stability even with open door thanks to an all-round profile frame
- Two extremely rigid hinged doors, 3.0 mm thick, can be rotated through 270 degrees
- Open doors are secured by magnets

- Easy to use, one-handed, central twist lock ensures safely locked doors, even during transport by truck
- Good noise insulation and dust protection due to the all-round EPDM seal integrated onto the doors as well as the base and top profile
- Smooth interior with no indentations for easy handling and cleaning
- Handles on each short side
- All-round, abrasion-resistant, blue PVC bumper on the top and lower rim of the trolley
- DIN A4 document frame on the inside of the door
- Torsion-resistant trolley undercarriage due to the BiTubAl® system
- Galvanised steel wheel housing, Supratech wheels, 200 mm wheel, polypropylene wheel centre, thermoplastic rubber tread, non-marking, precision ball bearings
- Wheel arrangement B



Wheel arrangement B:  
2 swivel castors with  
brakes and 2 fixed  
castors



G®-CUP ISO  
E 2733



## Modular cupboard trolley G®-CUP ISO E 2731

- With a rigid handle on the door

| Model number | Wheel arrangement | Dimensions L x W x H approx. mm | Volume approx. l | Plastic table (mm) | Grid spacing approx. mm | Wheel Ø (mm) | Load capacity approx. kg | Weight approx. kg | Order no. |
|--------------|-------------------|---------------------------------|------------------|--------------------|-------------------------|--------------|--------------------------|-------------------|-----------|
| E 2731       | B                 | 465 x 635 x 1170                | 345              | 9                  | 124                     | 125          | 100                      | 46                | 024273110 |
| E 2732       | B                 | 900 x 635 x 1170                | 670              | 18                 | 124                     | 200          | 200                      | 67                | 024273220 |
| E 2733       | B                 | 1330 x 635 x 1170               | 990              | 27                 | 124                     | 200          | 300                      | 82.5              | 024273330 |



G®-CUP ISO  
E 2731



G®-CUP ISO  
E 2732

The anodised aluminium modular cupboard  
trolley G®-CUP ISO E 273 in detail



## Our perfect 'logistics assistant'

Whether order picking in e-commerce, in the industrial sector, in a workshop or in the healthcare sector, Gmöhling shelf trolleys always ensure an efficient workflow. They guarantee reliable transport, the intermediate storage of parts as well as order-based disbursement or portioning at the conveyor belt.

Always easily manageable and readily available everywhere, they reduce setup and transit times.

The trolleys are optimised for the use of open-fronted storage bins. This makes our trolleys an indispensable component in many processes in companies that bring clear improvements to internal workflows. The shelf trolleys are extremely stable with a low net weight.

## Advantages of the G<sup>®</sup>-ORG

- Suitable for the transport of open-fronted storage bins (500 x 300 x 200 mm)
- Easy handling and ergonomic, even at maximum load
- Flexible, ideal when space is tight
- An optimum overview and direct access to the contents
- Very stable and high quality due to the welded shelves



## Shelf trolley G®-ORG E 2801

- Smooth surface
- 4 permanently welded shelves create 5 evenly spaced storage compartments



G®-ORG  
E 2801/4



G®-ORG  
E 2801/6

- Storage compartments with a raised rim at the side and rear
- Space between the shelves 230 mm
- Every shelf can be fully loaded up to 100 kg equally distributed
- 25 x 25 mm square aluminium pillar profiles on the short sides are also used for pushing the trolley
- All-round, abrasion-resistant, blue PVC bumper on the lower rim of the trolley
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, 160 mm diameter wheel, non-marking solid rubber wheels, roller bearings and thread guards
- Wheel arrangement D



Wheel arrangement D:  
4 swivel castors, 2 of  
which have brakes



G®-ORG  
E 2801/7

| Model number | Wheel arrangement | Dimensions L x W x H (approx. mm) |                   | Number of bins | Number of compartments | Compartment height (approx. mm) | Wheel-Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|--------------|-------------------|-----------------------------------|-------------------|----------------|------------------------|---------------------------------|--------------|----------------------------|---------------------|-----------|
|              |                   | internal                          | external          |                |                        |                                 |              |                            |                     |           |
| E 2801/4     | D                 | 980 x 520 x 1135                  | 1070 x 590 x 1405 | 15             | 5                      | 230                             | 160          | 300                        | 36                  | 023280104 |
| E 2801/5     | D                 | 980 x 520 x 1390                  | 1070 x 590 x 1660 | 18             | 6                      | 230                             | 160          | 300                        | 40                  | 023280105 |
| E 2801/6     | D                 | 1290 x 520 x 1150                 | 1380 x 590 x 1420 | 20             | 5                      | 230                             | 160          | 300                        | 43                  | 023280106 |
| E 2801/7     | D                 | 1290 x 520 x 1390                 | 1380 x 590 x 1660 | 24             | 6                      | 230                             | 160          | 300                        | 48                  | 023280107 |



## Shelf trolley G®-ORG E 2801/5 and E 2801/7

- 5 permanently welded shelves create 6 evenly spaced storage compartments

### TIP

- Very low net weight with a high degree of stability
- Suitable for the transport of standard open-fronted storage bins with the dimensions 500 x 300 x 200 mm (L x W x H)
- Many versions for a different capacity of open-fronted storage bins

### Tailor-made solutions:



e.g. Sorting trolley for pick-to-light frame

## Hazardous goods packaging

### Advantages of the G<sup>®</sup>-safe BOX

- 
- 
- 
- 
- 
- 
- 

#### Gmöhling hazardous goods packaging (ADR)

- 
- 
- 

#### In accordance with international regulations

- 
- 
- 



## Hazardous goods packaging G®-safe BOX A 1589



G®-safe BOX  
A 1589/73 4B Y

- All-round, extremely stable rim profiles at the top and bottom, as well as a lid, ensure a durable container design
- Side walls (from a volume of 73 l) reinforced with all-round trapezoidal beading (rib)
- Hinged lid, all-round rubber seal and 2 straps
- Stable spring-drop handle on 2 short sides
- 2 toggle fasteners with protection against springing open and with an anti-crushing mechanism continuously protects the seal against deformation
- Toggle fasteners with the option of attaching seals and / or shackle locks / padlocks with a shackle with a thickness of up to 6.5 mm
- 30 mm corner radius
- Stackable and match pallet dimensions (see table for exception)

| Model number      | Euro pallet size | Dimensions L x W x H (approx. mm) |                  | Volume (approx. l) | Weight (approx. kg) | Maximum permissible gross weight (approx. kg) | Order no. |
|-------------------|------------------|-----------------------------------|------------------|--------------------|---------------------|-----------------------------------------------|-----------|
|                   |                  | internal                          | external         |                    |                     |                                               |           |
| A 1589 / 29 4B X  | yes              | 553 x 353 x 150                   | 588 x 388 x 180  | 29                 | 4                   | 40                                            | 210158909 |
| A 1589 / 60 4B X  | yes              | 553 x 353 x 310                   | 588 x 388 x 340  | 60                 | 5                   | 51                                            | 210158905 |
| A 1589 / 73 4B X  | yes              | 553 x 353 x 380                   | 588 x 388 x 410  | 73                 | 5.5                 | 56                                            | 210158916 |
| A 1589 / 156 4B X | yes              | 753 x 553 x 380                   | 788 x 588 x 410  | 156                | 10                  | 60                                            | 210158903 |
| A 1589 / 239 4B X | yes              | 753 x 553 x 580                   | 788 x 588 x 610  | 239                | 12                  | 88                                            | 210158908 |
| A 1589 / 327 4B X | yes              | 1153 x 753 x 380                  | 1188 x 788 x 410 | 327                | 17                  | 150                                           | 210158918 |
| A 1589 / 29 4B Y  | yes              | 553 x 353 x 150                   | 588 x 388 x 180  | 29                 | 4                   | 40                                            | 210158910 |
| A 1589 / 42 4B Y  | yes              | 553 x 353 x 220                   | 588 x 388 x 250  | 42                 | 4.5                 | 44                                            | 210158911 |
| A 1589 / 73 4B Y  | yes              | 553 x 353 x 380                   | 588 x 388 x 410  | 73                 | 5.5                 | 56                                            | 210158913 |
| A 1589 / 156 4B Y | yes              | 753 x 553 x 380                   | 788 x 588 x 410  | 156                | 10                  | 86                                            | 210158915 |
| A 1589 / 239 4B Y | yes              | 753 x 553 x 580                   | 788 x 588 x 610  | 239                | 12                  | 88                                            | 210158917 |
| A 1589 / 327 4B Y | yes              | 1153 x 753 x 380                  | 1188 x 788 x 410 | 327                | 17                  | 150                                           | 210158919 |

## TIP



- Ergonomic and safe stacking thanks to the Gröbbling stacking rim, thus considerably simplifying the handling
- Ideal for high stacks and when space is tight

## Structure of the UN approval number

| UN symbol                                                                                                               | 4 = packaging type (box)<br>8 = material used (aluminium) | Suitable for packing groups I, II & III | Max. gross weight in kg | Solid - for solids or for the inclusion of inner packaging | Year of manufacture - in this case 2022 | Country code |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------|-------------------------|------------------------------------------------------------|-----------------------------------------|--------------|
|                                                                                                                         |                                                           |                                         |                         |                                                            |                                         |              |
| Approval number of the manufacturer of the hazardous goods packaging against which they can be unequivocally identified |                                                           |                                         |                         |                                                            |                                         |              |



## Details of the hazardous goods packaging G®-safe BOX



Lid with retaining strap and all-round rubber seal



Safety catch in the toggle fastener



UN certification

## The stackable boxes and crates

### Advantages of the G®-BOX

- 
- 
- 
- 
- 
- 




**TIP**







- 1 Smooth or scratch-resistant surface
- 2 All-round, extremely stable profiles on the top rim of the container, bottom and lid ensure a durable container design
- 3 Walls (starting with size of 73 l) reinforced with all-round trapezoidal beadings (ribs)
- 4 Hinged lid, all-round rubber seal and 2 straps
- 5 Stable spring-drop handle on both short sides
- 6 2 toggle fasteners with an anti-crushing mechanism continuously protects the seal against deformation
- 7 30 mm corner radius
- 8 Stackable and match to pallet dimensions (see table for exceptions)




Static load test

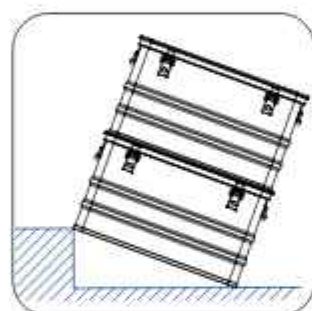


Stacking test

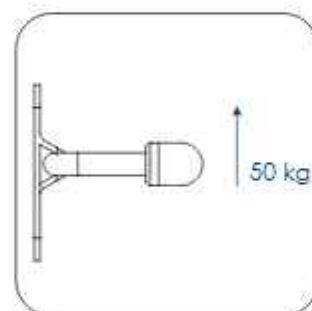


Carry test

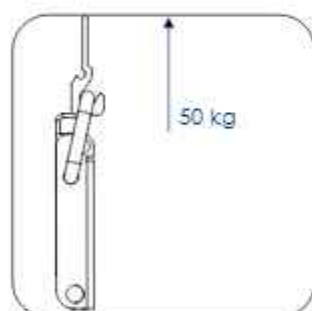

Tensile test

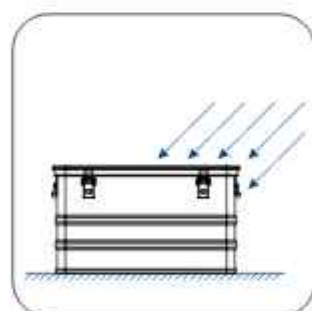

Splash test

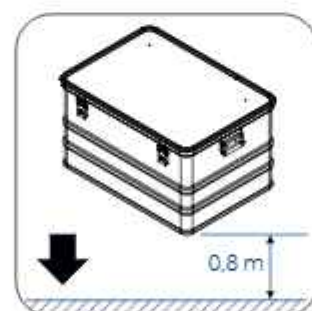


Drop test

| Box comparison                    | A 1569                      | A 1589                           | A 1539                                         | A 1599                           |
|-----------------------------------|-----------------------------|----------------------------------|------------------------------------------------|----------------------------------|
| Name                              | G <sup>®</sup> -premium BOX | G <sup>®</sup> -premium plus BOX | G <sup>®</sup> -allround BOX                   | G <sup>®</sup> -professional BOX |
| Material surface                  | smooth                      | smooth                           | scratch-resistant                              | scratch-resistant                |
| Material thickness                | 1 mm                        | 1 mm                             | 1 mm                                           | 1 mm                             |
| Strap                             | yes                         | yes                              | no                                             | yes, except A 1599/26            |
| Stackable                         | yes                         | yes                              | to a limited extent                            | yes                              |
| Size                              | Gmöhling format             | compatible with competitors      | compatible with competitors, except A 1539/150 | compatible with competitors      |
| Hinged lock                       | yes                         | yes                              | no                                             | no                               |
| Removable lid                     | no                          | no                               | yes                                            | yes                              |
| Euro pallet size                  | no                          | yes, except A 1589/115           | no                                             | yes, except A 1599/85 und 115    |
| Hazardous goods with BAM approval | yes                         | yes                              | no                                             | on request                       |




- ! More ergonomic and safe stacking thanks to the stacking rim
- ! Quicker and easier to stack without stacking corners
- ! Ideal for high stacks and when space is tight

## Transport box G®-premium BOX A 1569

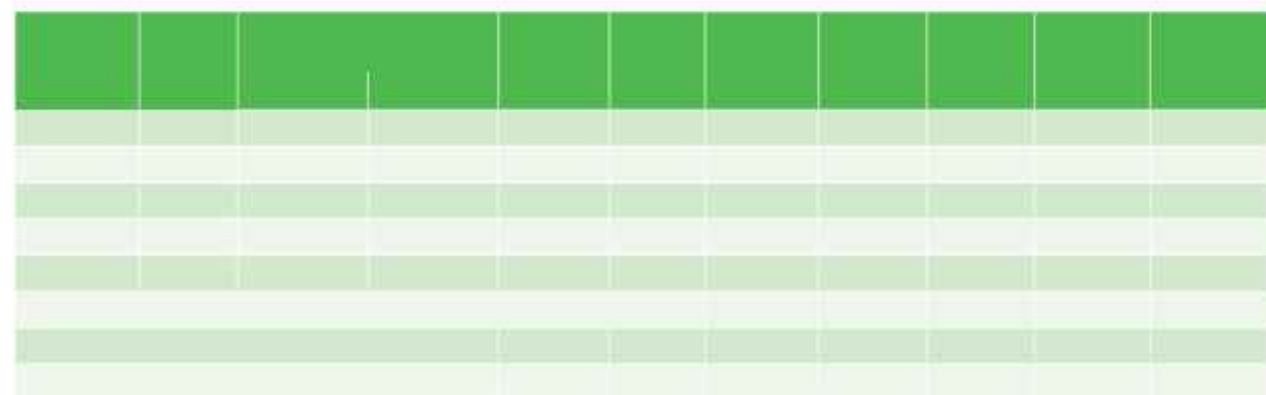

## Transport box G®-premium plus BOX A 1589

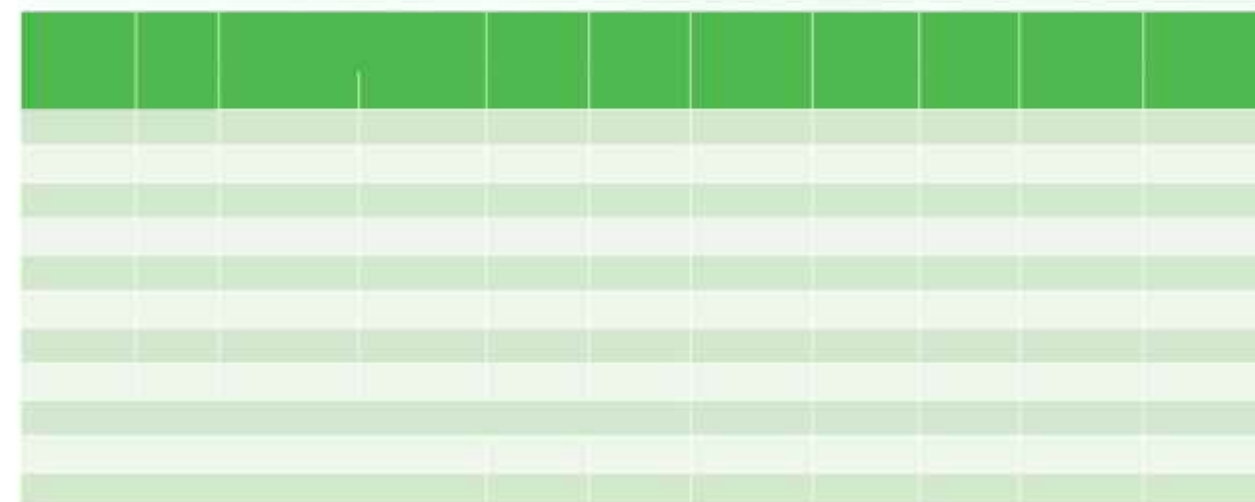


**Transport box**  
**G®-allround BOX A 1539**

[illegible]

**Transport box**  
**G®-professional BOX A 1599**

[illegible]

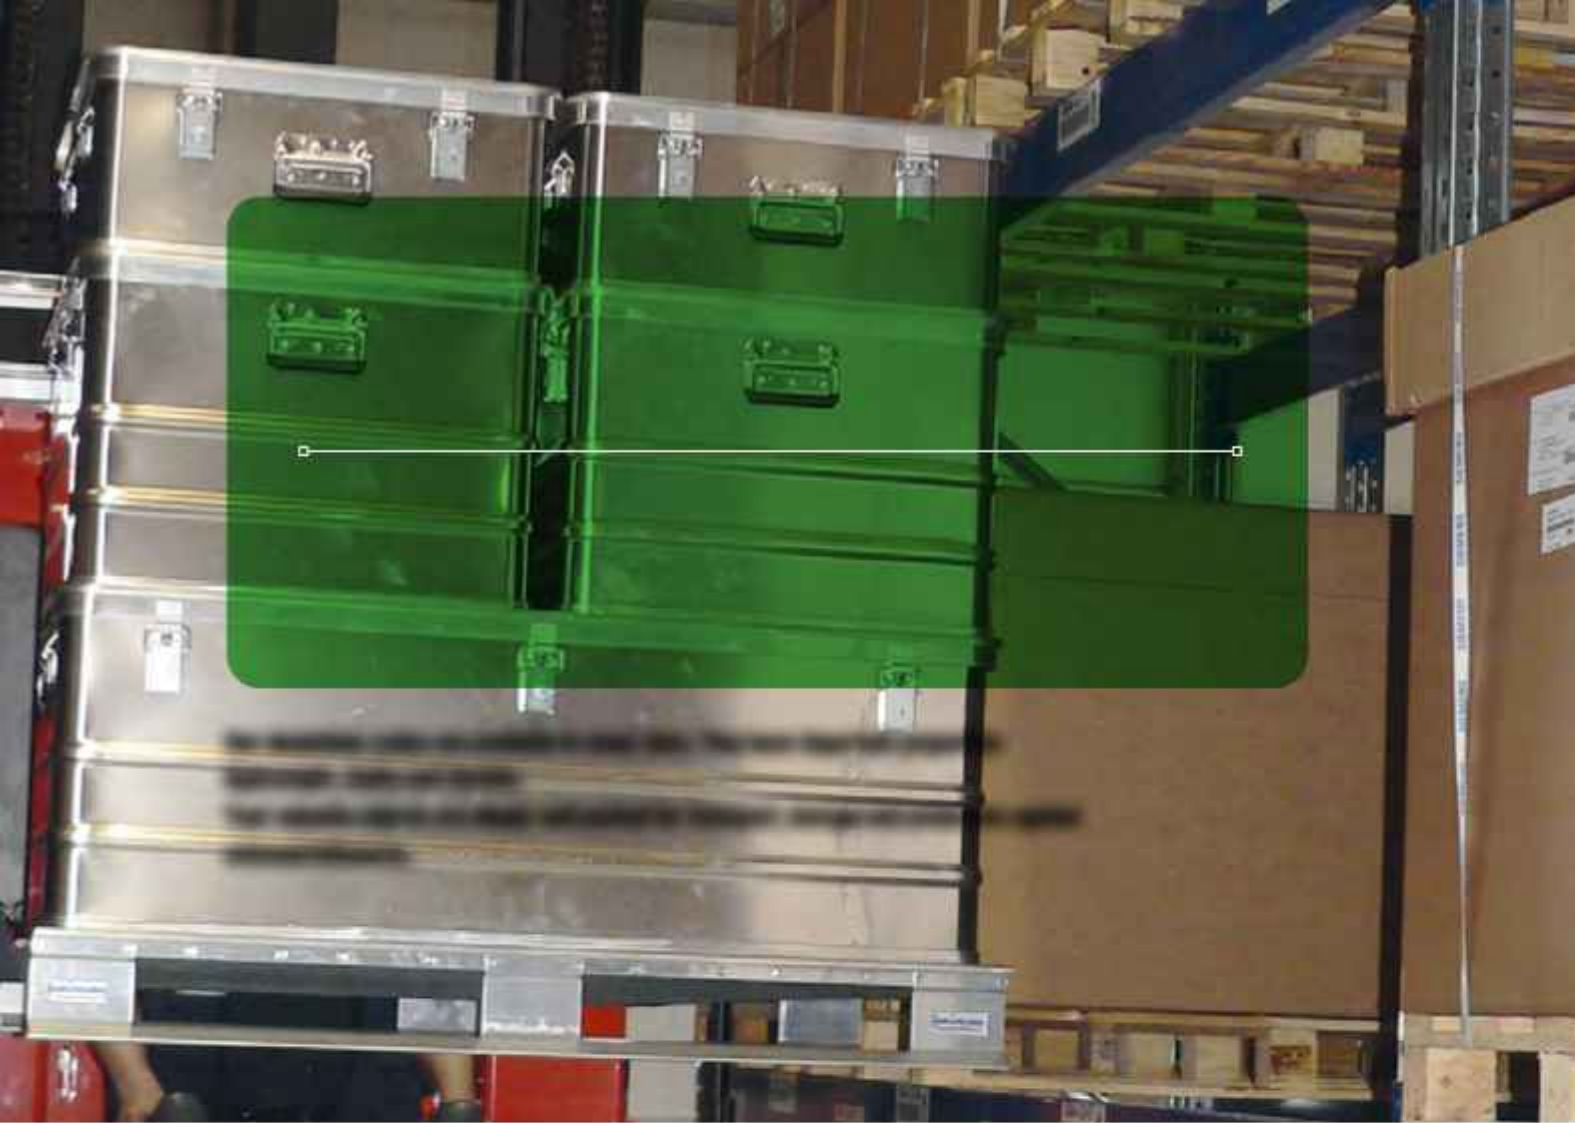

WHY ALUMINIUM?

TRANSPORT TROLLEYS

SPRING-LOADED BASE TROLLEYS

CUPBOARD TROLLEYS

MODULAR CUPBOARD TROLLEYS

SHELF TROLLEYS

HAZARDOUS GOODS

BOXES

ROLLER BOXES

CRATES AND BASKETS

CONTAINER DOLLIES

TRANSPORT CASES

DATA DISPOSAL CONTAINERS

WASTE AND RECYCLABLES COLLECTING STATIONS

DISPOSAL CONTAINERS

BALLOT BOXES

SERVING TROLLEYS



Every industry has its individual requirements that cannot always be met with standard solutions. We will show you some examples from our decades of experience with successful projects in the following areas: healthcare, automotive industry, pharmaceutical industry, electrical industry, intralogistics, textile industry etc.

Gmöhling was the inventor of the world's first foldable box for the Berlin Airlift.

Please do not hesitate to contact us!



Lacquered universal box,  
lid with checker plate



Design box



Stacking container,  
extra long



Mobile transport box with a  
forklift pocket for long goods



Foldable stacking container



Stacking containers  
made of checker plate



Transport boxes  
for use as a  
storage rack



Transport box with  
window and moulded  
foam



Transport box with  
divider wall system  
and inlay

## Storage and movement



### Advantages of the G®-roll BOX

- 
- 
- 
- 
- 
-

## Roller box G®-roll BOX A 1599



G®-roll BOX  
A 1599/105



G®-roll BOX  
A 1599/150

- Structured, scratch-resistant surface
- All-round, extremely stable profiles on the top rim of the container, base and lid ensure a durable container design
- Walls reinforced with all-round trapezoidal beadings (ribs)
- Hinged lid, all-round rubber seal and 2 straps
- The lid can be removed if necessary
- Stable spring-drop handle on both short sides
- 2 toggle fasteners with the option of attaching seals and / or shackle locks / padlocks with a shackle thickness of up to 6.5 mm
- 30 mm corner radius
- Stackable
- 2 stable castors on one short side, 50 mm wheel, rubber tread

| Model number                      | Euro pallet size | Dimensions L x W x H (approx. mm) |                  | Volume (approx. l) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|-----------------------------------|------------------|-----------------------------------|------------------|--------------------|----------------------------|---------------------|-----------|
|                                   |                  | internal                          | external         |                    |                            |                     |           |
| A 1599 / 105 R                    | no               | 870 x 350 x 345                   | 950 x 385 x 373  | 105                | 75                         | 7                   | 010159951 |
| A 1599 / 150 R                    | no               | 975 x 415 x 375                   | 1055 x 450 x 403 | 150                | 75                         | 8.5                 | 010159952 |
| Cylinder lock for toggle fastener |                  |                                   |                  |                    |                            |                     | 045031001 |



## TIP

- ! The solution for the transport of heavy goods
- ! Protects your goods reliably for transport and storage

## Options:



Cylinder lock for toggle fastener



Embossing

## Details:



Add-on castor set consisting of a left and right castor



Hole for padlock (or seal) with a maximum shackle thickness of 6.5 mm available

## Transport container, packaging and storage unit in one

### Advantages of the G®-CRATE and G®-STACK

- 
- 
- 
- 
- 

**TIP**



## Transport crate G®-CRATE A 152

- Smooth surface
- All-round, extremely stable profiles on the top rim of the container and bottom ensure a durable container design
- Walls reinforced with all-round trapezoidal beadings (ribs)
- 2 ergonomic integrated handles
- 30 mm corner radius
- Stackable and match to pallet dimensions (see table for exceptions)



G®-CRATE  
A 152/FK 27



G®-CRATE  
A 152/FK 27 | Lid



G®-CRATE  
A 152/36

G®-CRATE  
A 152/FK52



## Perforated transport crate G®-CRATE A 152/FK 35

- Perforated walls and base with 10 mm Ø hole, 22.5 x 22.5 mm hole spacing

### TIP



- Ergonomic and safe stacking thanks to the stacking rim
- Ideal for high stacks and when space is tight
- Also stackable with loose lid

| Model number           | Euro pallet size | Dimensions L x W x H (approx. mm) |                 | Volume (approx. l) | Weight (approx. kg) | Load capacity (approx. kg) | Walls and bases | Order no. |
|------------------------|------------------|-----------------------------------|-----------------|--------------------|---------------------|----------------------------|-----------------|-----------|
|                        |                  | internal                          | external        |                    |                     |                            |                 |           |
| A 152 / 36             | yes              | 548 x 348 x 205                   | 578 x 378 x 230 | 36                 | 3                   | 50                         | solid           | 000015221 |
| A 152 / 55             | yes              | 548 x 348 x 305                   | 578 x 378 x 330 | 55                 | 3.5                 | 50                         | solid           | 000015223 |
| A 152 / 77             | yes              | 728 x 548 x 205                   | 758 x 578 x 230 | 77                 | 4.5                 | 50                         | solid           | 000015225 |
| A 152 / 116            | yes              | 728 x 548 x 305                   | 758 x 578 x 330 | 116                | 5                   | 50                         | solid           | 000015227 |
| A 152 / 155            | yes              | 728 x 548 x 405                   | 758 x 578 x 430 | 155                | 5.5                 | 50                         | solid           | 000015229 |
| A 152 / FK 27          | no               | 620 x 400 x 235                   | 650 x 430 x 260 | 60                 | 3.5                 | 50                         | solid           | 000015203 |
| A 152 / FK 35          | no               | 620 x 400 x 315                   | 650 x 430 x 340 | 80                 | 4                   | 50                         | solid           | 000015205 |
| A 152 / FK 35          | no               | 620 x 400 x 315                   | 650 x 430 x 340 | 80                 | 4                   | 50                         | perforated      | 000015206 |
| A 152 / FK 52          | no               | 620 x 400 x 480                   | 650 x 430 x 505 | 120                | 4.5                 | 50                         | solid           | 000015207 |
| Loose lid for A 152/FK |                  |                                   |                 |                    |                     |                            |                 | 045004901 |

## Stacking basket G®-STACK A 1130



G®-STACK  
A 1130/1

- Smooth surface
- All-round, extremely stable profiles on the top rim of the container and bottom ensure a durable container design
- 2 ergonomic integrated handles
- 15 mm corner radius
- 2 or 3 plastic runners on the bottom
- Stackable and match to pallet dimensions (see table for exceptions)



G®-STACK  
A 113/3

## Perforated transport basket G®-STACK A 113

- Walls and bottom perforated with 10 mm Ø holes, 22.5 x 22.5 mm hole spacing

## TIP



- Ergonomic and safe stacking thanks to the stacking rim
- Ideal for high stacks and when space is tight
- Suitable for conveyors



G®-STACK  
A 113/3

G®-STACK  
A 1130/1

| Model number | Euro pallet size | Dimensions L x W x H (approx. mm) |                 | Volume (approx. l) | Weight (approx. kg) | Load capacity (approx. kg) | Walls and bases | Order no. |
|--------------|------------------|-----------------------------------|-----------------|--------------------|---------------------|----------------------------|-----------------|-----------|
|              |                  | internal                          | external        |                    |                     |                            |                 |           |
| A 113 / 1    | yes              | 544 x 340 x 270                   | 564 x 360 x 288 | 50                 | 2.5                 | 40                         | perforated      | 000011308 |
| A 113 / 2    | no               | 703 x 436 x 270                   | 723 x 456 x 288 | 82                 | 4                   | 50                         | perforated      | 000011310 |
| A 113 / 3    | no               | 703 x 436 x 400                   | 723 x 456 x 418 | 122                | 4.5                 | 50                         | perforated      | 000011312 |
| A 1130 / 1   | yes              | 544 x 340 x 270                   | 564 x 360 x 288 | 50                 | 3                   | 40                         | solid           | 000113007 |
| A 1130 / 2   | no               | 703 x 436 x 270                   | 723 x 456 x 288 | 82                 | 4                   | 50                         | solid           | 000113009 |



WHY ALUMINIUM?

TRANSPORT TROLLEYS

SPRING-LOADED BASE TROLLEYS

CUPBOARD TROLLEYS

MODULAR CUPBOARD TROLLEYS

SHELF TROLLEYS

HAZARDOUS GOODS

BOXES

ROLLER BOXES

CRATES AND BASKETS

CONTAINER DOLLIES

TRANSPORT CASES

DATA DISPOSAL CONTAINERS

WASTE AND RECYCLABLES COLLECTING STATIONS

DISPOSAL CONTAINERS

BALLOT BOXES

SERVING TROLLEYS



## The indispensable container dolly

... for the easy handling of Gmöhling boxes, crates and baskets.

Our container dollies, also referred to as roller trolleys or dolly trolleys, are the perfect solution for effortless transport, even with heavy loads. We offer the container dollies in different sizes and loading heights.

### Advantages of the G<sup>®</sup>-DOLLY

- Suitable for the transport of Gmöhling boxes, crates and baskets
- Low net weight
- Available in 2 versions
- Available with an ergonomic, anodised handle



## Container dolly G®-DOLLY C 915



G®-DOLLY  
C 915/1

- All-round profile frame
- Low version, 150 mm loading height
- External height without handle 160 mm, with handle 925 mm
- Galvanised steel wheel housing, 100 mm wheel, non-marking solid rubber wheels, roller bearings and thread guards
- Wheel arrangement B or D



Wheel arrangement B:  
2 swivel castors and 2  
fixed castors



Wheel arrangement D:  
4 swivel castors



G®-STACK  
A 113/1 and A 1130/1  
and  
G®-DOLLY C 915/1  
with anodised handle

| Model number | Wheel arrangement | Internal frame dimensions L x B (ca. mm) | Wheel - Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) |             | Order number for container dollies |             |
|--------------|-------------------|------------------------------------------|----------------|----------------------------|---------------------|-------------|------------------------------------|-------------|
|              |                   |                                          |                |                            | without handle      | with handle | without handle                     | with handle |
| C 915 / 1    | B                 | 575 x 370                                | 100            | 200                        | 4                   | 5.5         | 228091551                          | 228091561   |
| C 915 / 1    | D                 | 575 x 370                                | 100            | 200                        | 4.5                 | 6.0         | 228091555                          | 228091565   |
| C 915 / FK   | B                 | 642 x 424                                | 100            | 200                        | 4.5                 | 6.0         | 228091554                          | 228091564   |
| C 915 / 2    | B                 | 724 x 459                                | 100            | 200                        | 4.5                 | 6.0         | 228091552                          | 228091562   |
| C 915 / 2    | D                 | 724 x 459                                | 100            | 200                        | 5                   | 6.5         | 228091556                          | 228091566   |
| C 915 / 4    | B                 | 772 x 572                                | 100            | 200                        | 5                   | 6.5         | 228091559                          | 228091569   |



G®-DOLLY  
C 913/FK

## Container dolly G®-DOLLY C 913

- High version, 440 mm loading height
- External height without handle 460 mm, with handle 925 mm

| Model number | Wheel arrangement | Internal frame dimensions L x B (approx. mm) | Wheel - Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) |             | Order number for container dollies |             |
|--------------|-------------------|----------------------------------------------|----------------|----------------------------|---------------------|-------------|------------------------------------|-------------|
|              |                   |                                              |                |                            | without handle      | with handle | without handle                     | with handle |
| C 913 / 1    | B                 | 575 x 370                                    | 100            | 200                        | 6.5                 | 8.0         | 228091351                          | 228091361   |
| C 913 / 1    | D                 | 575 x 370                                    | 100            | 200                        | 7.0                 | 8.5         | 228091355                          | 228091365   |
| C 913 / FK   | B                 | 642 x 424                                    | 100            | 200                        | 6.5                 | 8.0         | 228091354                          | 228091364   |
| C 913 / 2    | B                 | 724 x 459                                    | 100            | 200                        | 7.0                 | 8.5         | 228091352                          | 228091362   |
| C 913 / 2    | D                 | 724 x 459                                    | 100            | 200                        | 7.5                 | 9           | 228091356                          | 228091366   |
| C 913 / 4    | B                 | 772 x 572                                    | 100            | 200                        | 8.5                 | 10          | 228091359                          | 228091369   |

## TIP

- The perfect solution for the easy transport of all Gmöhling boxes, crates and baskets for intralogistics
- Suitable for heavy loads up to 200 kg
- We offer the container dollies in different sizes and loading heights for better ergonomics

| Model number             | Suitable for boxes on page 60 - 61                                                                                                                                                           | Suitable for crates on page 76 - 79                                          | Suitable for baskets on page 80 - 81 |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------|
| C 915 / 1<br>C 913 / 1   | A 1589 / 29<br>A 1589 / 42 - A 1599 / 42<br>A 1589 / 60 - A 1599 / 60<br>A 1589 / 73 - A 1599 / 73                                                                                           | A 152 / 36<br>A 152 / 55                                                     | A 113 / 1<br>A 1130 / 1              |
| C 915 / FK<br>C 913 / FK | A 1569 / FK 27<br>A 1569 / FK 35<br>A 1569 / FK 52                                                                                                                                           | A 152 / FK 27<br>A 152 / FK 35<br>A 152 / FK 52                              |                                      |
| C 915 / 2<br>C 913 / 2   |                                                                                                                                                                                              |                                                                              | A 113 / 2<br>A 113 / 3<br>A 1130 / 2 |
| C 915 / 4<br>C 913 / 4   | 2 x A 1589 / 29<br>2 x A 1589 / 42 - 2 x A 1599 / 42<br>2 x A 1589 / 60 - 2 x A 1599 / 60<br>2 x A 1589 / 73 - 2 x A 1599 / 73<br>A 1589 / 156 - A 1599 / 156<br>A 1589 / 239 - A 1599 / 239 | 2 x A 152 / 36<br>2 x A 152 / 55<br>A 152 / 77<br>A 152 / 116<br>A 152 / 155 |                                      |



Aluminium container dollies are small, lightweight, versatile and extremely efficient. For the easy transport of all GMÖHLING boxes crates and baskets. The perfect solution for internal transports.



Corner C 913



Corner C 915



Swivel castors



Anodised aluminium handle



Container dolly with 2 shelves



Table trolley

## High-quality transport cases

### Advantages of the G®-CASE

- 
- 
- 
- 
- 

! TIP

- 
- 
- 



## Transport case G®-CASE A 1539



G®-CASE  
A 1539/36

- Structured, extremely scratch-resistant surface
- All-round, extremely stable rim profiles on the case and lid ensure a durable case design
- Hinged lid and all-round rubber seal
- The lid can be removed if necessary
- Stable carry handle on the front
- 2 toggle fasteners with cylinder lock

| A 1539 / 36   Cylinder locks | no | 620 x 400 x 145 | 660 x 440 x 170 | 36 | 20 | 4.5 | 010153901 |
|------------------------------|----|-----------------|-----------------|----|----|-----|-----------|
| Pyramid foam for A 1539 / 36 |    |                 |                 |    |    | 0.5 | 045153901 |

## Special solutions:



Service case



Design case

Our cases are used for highly sensitive electronics, such as measuring instruments and test equipment, for transporting precious metals, for sports equipment, telecommunications equipment, high-value Hi-Fi components, laptops or musical instruments...



## Details:



Carry handle



Cylinder lock



Pyramid foam

## TOP SECRET

Gmöhling data disposal containers are available in different sizes and versions to ensure that even sensitive data and files are securely and optimally collected. Complying with the EU-General Data Protection Regulation (GDPR) up to security class 3.

Material subject to data protection can be collected in our data disposal containers, also referred to as file containers, and then transported for destruction as required by law. These containers can be equipped with various locking systems as required and naturally prevent unauthorised third party access to the data.

## Advantages of the G<sup>®</sup>-DOCU

- Secure and optimum collection and disposal of sensitive data and files in accordance with the BSDG and GDPR.
- Lid with insertion slot to protect against unauthorised access
- A choice of various locking systems
- Easy handling and ergonomic, even at maximum load



## Data disposal container G®-DOCU D 1009/80 and D 1009/120

- Smooth surface
- All-round, extremely stable rim profiles at the top and bottom ensure a durable container design
- Hinged lid with 2 straps and a 300 x 27 mm insertion slot with hand-entry guard
- 1 toggle fastener with cylinder lock
- 1 spring-drop handle on 2 sides
- 4 swivel castors, 50 mm diameter wheel, non-marking polyurethane wheels and plain bearings



G®-DOCU  
D 1009/80



G®-DOCU  
D 1009/80

G®-DOCU  
D 1009/120



## Data disposal container G®-DOCU A 1569/50 E

- Hinged lid without retaining straps with 300 x 30 mm insertion slot with hand-entry guard
- 2 toggle fasteners with cylinder locks
- Without wheels
- Without tether straps



G®-DOCU  
D 1009/80

**TIP**  
Fits well under desks

| Model number  | Dimensions L x W x H (approx. mm) |                 | Volume (approx. l) | Wheel - Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Lid with insertion slot | Insertion dimension (approx. mm) | Cylinder locks | Order no. |
|---------------|-----------------------------------|-----------------|--------------------|----------------|----------------------------|---------------------|-------------------------|----------------------------------|----------------|-----------|
|               | internal                          | external        |                    |                |                            |                     |                         |                                  |                |           |
| A 1569 / 50 E | 420 x 335 x 370                   | 455 x 370 x 395 | 50                 |                | 50                         | 4.5                 | yes                     | 13                               | 2              | 010156933 |
| D 1009 / 80   | 400 x 350 x 575                   | 435 x 385 x 650 | 80                 | 50             | 50                         | 6.5                 | yes                     | 11                               | 1              | 020100910 |
| D 1009 / 120  | 500 x 400 x 575                   | 535 x 435 x 650 | 120                | 50             | 50                         | 7.5                 | yes                     | 11                               | 1              | 020100920 |

## Data disposal container G®-DOCU D 1009/240

- Smooth surface
- All-round, extremely stable rim profiles at the top and bottom ensure a durable container design
- Hinged lid with 2 straps and a 420 x 27 mm insertion slot with hand-entry guard
- 1 toggle fastener with cylinder lock
- Ergonomic galvanised steel handle
- Steel axle with 2 wheels, 200 mm wheel, non-marking solid rubber wheels



G®-DOCU  
D 1009/240 ergo

G®-DOCU  
D 1009/240

| Model number                                                                     | Dimensions L x W x H (approx. mm) |                  | Volume (approx. l) | Wheel - Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Lid with insertion slot | Insertion dimension (approx. mm) | Cylinder locks | Order no. |
|----------------------------------------------------------------------------------|-----------------------------------|------------------|--------------------|----------------|----------------------------|---------------------|-------------------------|----------------------------------|----------------|-----------|
|                                                                                  | internal                          | external         |                    |                |                            |                     |                         |                                  |                |           |
| D 1009 / 120 H                                                                   | 450 x 275 x 990                   | 575 x 410 x 1010 | 120                | 200            | 100                        | 11.5                | yes                     | 11                               | 1              | 020100905 |
| D 1009 / 240 ergo                                                                | 450 x 550 x 990                   | 575 x 690 x 1010 | 236                | 200            | 100                        | 14.5                | yes                     | 11                               | 1              | 020100903 |
| D 1009 / 240 S ergo                                                              | 450 x 550 x 990                   | 575 x 690 x 1010 | 236                | 200            | 100                        | 14.5                | yes                     | 11                               | 1              | 020100904 |
| D 1009 / 240                                                                     | 450 x 550 x 990                   | 575 x 690 x 1010 | 240                | 200            | 100                        | 15                  | yes                     | 11                               | 1              | 020100901 |
| D 1009 / 240 S                                                                   | 450 x 550 x 990                   | 575 x 690 x 1010 | 240                | 200            | 100                        | 15                  | yes                     | 11                               | 1              | 020100902 |
| Insertion unit for D 1009 / 240 for disposing of files (see options on page 107) |                                   |                  |                    |                |                            | 5                   |                         |                                  | 1              | 045007010 |



## Data disposal container G®-DOCU D 1009/240 S

- Walls reinforced with all-round trapezoidal beading



## Data disposal container G®-DOCU D 1009/240 ergo and D 1009/240 S ergo

- Inner steel axle
- Easy handling due to lower tilt angle



## Data disposal container G®-DOCU D 1009/120 H

- Narrow version with 120 l volume

## TIP

- Container G®-DOCU ergo for easy handling, ergonomics, even at maximum load
- Many locking systems available
- Containers can be made from scratch-resistant structured aluminium

## Data disposal container G®-DOCU D 3009 E1HS



G®-DOCU  
D 3009/415 E1HS

- Smooth surface
- All-round, extremely stable rim profiles at the top and bottom ensure a durable trolley design
- Extremely stable, interlocking clinching of the aluminium profiles and walls
- Walls reinforced with all-round trapezoidal beadings (ribs)
- Hinged lid with 2 straps and a 420 x 27 mm insertion slot with hand-entry guard
- 1 toggle fastener with cylinder lock
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, non-marking solid rubber wheels, roller bearings and thread guards
- Swivel castors with brakes in accordance with European standard EN 1757-3
- Wheel arrangement B



Wheel arrangement B:  
2 swivel castors with  
brakes and 2 fixed  
castors



G®-DOCU  
D 3009/415 E1HS

| Model number                      | Dimensions L x W x H (approx. mm) |                  | Volume<br>(approx. l) | Wheel -Ø<br>(mm) | Load capacity<br>(approx. kg) | Weight<br>(approx. kg) | Lid with<br>insertion<br>slot | Insertion<br>dimension<br>(approx. mm) | Cylinder<br>locks | Order no. |
|-----------------------------------|-----------------------------------|------------------|-----------------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------------------------|-------------------|-----------|
|                                   | internal                          | external         |                       |                  |                               |                        |                               |                                        |                   |           |
| D 3009 / 415 E1HS                 | 1000 x 640 x 650                  | 1050 x 700 x 840 | 415                   | 125              | 250                           | 26                     | yes                           | 15                                     | 1                 | 220300901 |
| D 3009 / 415 E2HS                 | 1000 x 640 x 650                  | 1050 x 700 x 840 | 415                   | 125              | 250                           | 26                     | yes                           | 15                                     | 2                 | 220300903 |
| D 3009 / 415                      | 1000 x 640 x 650                  | 1050 x 700 x 840 | 415                   | 125              | 250                           | 26                     | no                            | -                                      | optional 2        | 220300841 |
| D 3009 / 656 E2HS                 | 1250 x 700 x 750                  | 1300 x 750 x 940 | 656                   | 125              | 250                           | 32.5                   | yes                           | 15                                     | 2                 | 220300905 |
| D 3009 / 656                      | 1250 x 700 x 750                  | 1300 x 750 x 940 | 656                   | 125              | 250                           | 32.5                   | no                            | -                                      | optional 2        | 220300845 |
| Cylinder lock for toggle fastener |                                   |                  |                       |                  |                               |                        |                               |                                        |                   | 045031001 |



G®-DOCU  
D 3009/656 E2HS

## Data disposal container G®-DOCU D 3009 E2HS

- 2 toggle fasteners with cylinder locks



G®-DOCU  
D 3009/415

## Data disposal container G®-DOCU D 3009

- Optionally with cylinder locks in the toggle fasteners
- Closed lid

## TIP



- Special insertion shafts are possible for files and other data storage media, such as hard disks, credit cards etc.
- You can find more trolley options on page 10 - 13

## Data disposal container G®-DOCU D 3709 E2HS



G®-DOCU  
D 3709/650 E2HS



G®-DOCU  
D3709/650 E2HS

- Smooth surface
- All-round, extremely stable rim profiles at the top and bottom ensure a durable trolley design
- Extremely stable, interlocking clinching of the aluminium profiles and walls
- Walls reinforced with all-round trapezoidal beading, front and slide down wall without beading
- Hinged lid with 2 straps and 500 x 40 mm insertion shaft with hand-entry guard
- 2 toggle fasteners with cylinder locks
- Stable undercarriage support made of galvanised steel
- Galvanised steel wheel housing, non-marking solid rubber wheels, roller bearings and thread guards
- Swivel castors with brakes in accordance with European standard EN 1757-3
- Wheel arrangement B



Wheel arrangement B:  
2 swivel castors with brakes  
and 2 fixed castors

| Model number                      | Dimensions L x W x H (approx. mm) |                  | Volume (approx. l) | Wheel - Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Lid with insertion slot | Insertion dimension (approx. mm) | Cylinder locks | Order no. |
|-----------------------------------|-----------------------------------|------------------|--------------------|----------------|----------------------------|---------------------|-------------------------|----------------------------------|----------------|-----------|
|                                   | internal                          | external         |                    |                |                            |                     |                         |                                  |                |           |
| D 3709 / 650 E2HS                 | 1250 x 645 x 800                  | 1300 x 700 x 990 | 650                | 125            | 250                        | 37                  | yes                     | 41                               | 2              | 220370834 |
| D 3709 / 650                      | 1250 x 645 x 800                  | 1300 x 700 x 990 | 650                | 125            | 250                        | 37                  | no                      | -                                | optional 2     | 220370833 |
| Cylinder lock for toggle fastener |                                   |                  |                    |                |                            |                     |                         |                                  |                | 045031001 |



G®-DOCU  
D 3709/650



G®-DOCU  
D 3709/650

## Data disposal container G®-DOCU D 3709

- Optionally with cylinder locks in the toggle fasteners
- Closed lid

## TIP

- Front flap enables easy manual unloading
- You can find more trolley options on page 14 - 15



Insertion unit for G\*-DOCU D 1009/240 for disposing of files; 405 x 100 mm insertion shaft with hand-entry guard; insertion slot function in the lid remains unaffected



Digital lock meets the requirements of security class 3



Combination lock



Insertion slot



Insertion shaft



Ergonomic handle



Embossing and/or consecutive numbering



Stacking corners



PVC bumper on the lid



Steel axle



Ergo version with ergonomic tilt angle



Wheel brake



Spring flap optionally with locking



Slam lock with deep embossing



Gravity lock



- WHY ALUMINIUM?
- TRANSPORT TROLLEYS
- SPRING-LOADED BASE TROLLEYS
- CUPBOARD TROLLEYS
- MODULAR CUPBOARD TROLLEYS
- SHELF TROLLEYS
- HAZARDOUS GOODS
- BOXES
- ROLLER BOXES
- CRATES AND BASKETS
- CONTAINER DOLLIES
- TRANSPORT CASES
- DATA DISPOSAL CONTAINERS
- WASTE AND RECYCLABLES COLLECTING STATIONS
- DISPOSAL CONTAINERS
- BALLOT BOXES
- SERVING TROLLEYS

## Recycling is worth it ...for the sake of the environment

The Gmöhling waste and recyclable collecting station  
helps you with waste separation

### Advantages of the G<sup>®</sup>-COLLECT

- 
- 
- 
- 
- 



## Waste and recyclables collecting station G®-COLLECT X 2001



- Anodised surface
- For collecting and separating waste and recyclables
- Collection container with 1 compartment
- One 45 l plastic container can be individually removed from each compartment
- Front-opening flap door opens with foot pedal
- Flap with blue plastic handle
- 1 door per compartment fitted on the rear side, each plastic container can be individually removed
- Hinged rear doors with magnetic catch
- Polypropylene wheels, 50 mm wheel, thermoplastic rubber tread, non-marking, precision ball bearings, electrically conductive
- Wheel arrangement D



Wheel arrangement D:  
4 swivel castors, 2 of  
which have brakes



G®-COLLECT  
X 2001/1

| Model number | Wheel arrangement | Dimensions L x W x H (approx. mm) | Number of containers | Wheel-Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|--------------|-------------------|-----------------------------------|----------------------|--------------|----------------------------|---------------------|-----------|
| X 2001 / 1   | D                 | 370 x 490 x 800                   | 1                    | 50           | 25                         | 9.5                 | 026200101 |
| X 2001 / 2   | D                 | 720 x 490 x 800                   | 2                    | 50           | 50                         | 14.5                | 026200102 |
| X 2001 / 3   | D                 | 1070 x 490 x 800                  | 3                    | 50           | 75                         | 20                  | 026200103 |
| X 2001 / 4   | D                 | 1420 x 490 x 800                  | 4                    | 50           | 100                        | 25                  | 026200104 |



## Waste and recyclables collecting station G®-COLLECT X 2001/2

- Collection container with 2 compartments



## Waste and recyclables collecting station G®-COLLECT X 2001/3

- Collection container with 3 compartments



## Waste and recyclables collecting station G®-COLLECT X 2001/4

- Collection container with 4 compartments



# Hygienic Disposal Container

The Gmöhling aluminum container for an easy, hygienic disposal of disposable gloves and protective material. Available in 2 sizes, the container are flexible in use and place.

Because of their smooth surface they are more hygienic and quick to clean and disinfect.

Less spread of germs and viruses, as there's no air pressure from e.g. a falling lid for maximum safety.

Equipped with wheels and handles for an easy and ergonomic handling.

## TIP



- Flexible, can also be used for other purposes, e.g. for collecting disposable bottles

## Advantages of the G<sup>®</sup>-DROP

- Less spread of germs and viruses, as there's no air pressure from e.g. a falling lid
- Contactless insertion for maximum security
- Hygienic, smooth surface for a quick disinfection
- Suitable for tearproof standard plastic bags (75µ+)
- Equipped with wheels and handles for an easy and ergonomic handling



## Disposal Container G®-DROP 80 und 240

- Smooth surface
- All-round, extremely stable rim profiles at the top and bottom ensure a durable container design
- Hinged lid with 2 straps
- Circular opening hole Ø approx. 135 mm
- Toggle fastener with cylinder lock and 2 keys
- Interchangeable lid, can also be used for data disposal with another lid



G®-DROP / 80

G®-DROP / 240

| Model number | Dimensions (approx. mm) |                  | Volume<br>(approx. l) | Load<br>capacity<br>(approx. kg) | Weight<br>(approx. kg) | Ø Insertion<br>opening<br>(approx. mm) | Order no. |
|--------------|-------------------------|------------------|-----------------------|----------------------------------|------------------------|----------------------------------------|-----------|
|              | internal                | external         |                       |                                  |                        |                                        |           |
| G-DROP / 80  | 400 x 350 x 575         | 435 x 385 x 650  | 80                    | 50                               | 6.5                    | 135                                    | 220100916 |
| G-DROP / 240 | 450 x 550 x 990         | 575 x 690 x 1010 | 240                   | 100                              | 15                     | 135                                    | 220100919 |



G®-DROP / 80



G®-DROP / 240

## Disposal Container G®-DROP / 80

- 1 spring-drop handle on 2 sides
- 4 swivel castors, 50 mm diameter wheel, non-marking polyurethane wheels and plain bearings
- Wheels are interchangeably bolted to the bottom of the container

**TIP**  
Fits well under desks

## Disposal Container G®-DROP / 240

- Ergonomic galvanised steel handle
- Steel axle with 2 wheels, 200 mm wheel, non-marking solid rubber wheels

## The right choice for everyone!

The Gmöhling ballot box is perfect for general elections but also for elections or votes, such as at a workplace, club or school etc. The container can even be used for tombola and raffle draws.

The ballot box is made of sturdy aluminium. To prevent tampering, the boxes have a slot in the lid and can be locked; they can also be fitted with a seal.

The box is available in different versions - the right choice for everyone.



## Advantages of the G®-VOTE A 1569

- Ideal for use in elections, tombola and raffle draws
- Robust container for many years of use
- Protects against unauthorised access
- Different versions - the right one for everyone
- Low net weight
- For the insertion of ballot papers up to DIN A4 size, even when folded

## TIP

- The ballot box G®-VOTE A 1569/110 meets the requirements of section 51 of the Federal Elections Act
- The boxes have an insertion slot in the lid to prevent tampering
- Extremely durable and scratchproof due to the scratch-resistant aluminium
- Stackable, space-saving for transport and storage

## Ballot box G®-VOTE A 1569/110

- Structured, extremely scratch-resistant surface
- All-round, extremely stable profiles on the container rim, bottom and lid

- Hinged lid with 250 x 20 mm insertion slot and all-round rubber seal
- 1 toggle fastener with cylinder lock; drill hole for padlock with a shackle thickness of 6.5 mm or seals is possible
- 1 stable spring-drop handle on 2 sides
- 30 mm corner radius
- Stackable



G®-VOTE  
A 1569/110

| Model number | Dimensions L x W x H (approx. mm) |                 | Volume (approx. l) | Lid with insertion slot | Cylinder locks | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|--------------|-----------------------------------|-----------------|--------------------|-------------------------|----------------|----------------------------|---------------------|-----------|
|              | internal                          | external        |                    |                         |                |                            |                     |           |
| A 1569 / 50  | 422 x 335 x 368                   | 457 x 370 x 398 | 50                 | yes                     | 2              | 50                         | 4.5                 | 210156933 |
| A 1569 / 110 | 350 x 350 x 900                   | 385 x 385 x 930 | 110                | yes                     | 1              | 50                         | 6                   | 010156944 |



## Ballot box G®-VOTE A 1569/50

- Smooth surface
- Hinged lid with 300 x 30 mm insertion slot
- 2 toggle fasteners with simultaneous locking cylinder locks

## Smart appearance

Ballot boxes suitable for towns and cities, authorities, companies and clubs. From small elections, such as club and work council elections to municipal elections, state elections or national elections. You will always make the right choice with Gmöhling!



Insertion slot in the lid



Protection against unauthorised access

## Versatile, adaptable and convenient

The Gmöhling multi-purpose trolley has a modular structure that has been thoughtfully designed down to the very last detail. You can choose between 2, 3 and 4 shelves. The height position and the number of shelves can also be subsequently changed. The shelves are available in 2 versions: aluminium or stainless steel.



### Advantages of the G<sup>®</sup>-SERV

- Modular design available with a choice of 2, 3 or 4 shelves
- A choice of aluminium or stainless steel shelves
- Height position and number of shelves can be subsequently changed
- Practical for a wide range of uses

## Serving trolley G®-SERV E 9501 A and E 9502 A with aluminium shelves

- Modular design available with a choice of 2, 3 or 4 shelves
- Available in 2 sizes



- Anodised shelves
- Shelves with an all-round, raised profile rim made of anodised aluminium
- Shelves can be fully loaded up to 60 kg
- 25 x 25 mm square anodised aluminium pillar profiles on the short sides are also used as a handle
- Shelves screw to the handles
- 5 mounting positions allow for variable shelf spacing
- Grey bumpers with a diameter of 100 mm on each wheel
- Galvanised steel wheel housing, wheels with a thermoplastic rubber tread and plain bearings
- Wheel arrangement D



Wheel arrangement D:  
4 swivel castors, 2 of  
which have brakes



## Serving trolley G®-SERV E 9501 E and E 9502 E with stainless steel shelves

- Polished stainless steel shelves
- Shelves with an all-round, raised profile rim made of anodised aluminium


### TIP

- Lightweight, stable and robust - ideal for any use
- Hygienic and easy to clean
- Suitable for the transport of food and crockery in the catering industry, hotel trade, care homes and hospitals as well as for the transport of goods in trade and industry

| Model number | Wheel arrangement | External dimensions L x W x H (approx. mm) | Shelf size (approx. mm) | Shelf surface   | Number of shelves | Compartment height (approx. mm) | Wheel -Ø (mm) | Load capacity (approx. kg) | Weight (approx. kg) | Order no. |
|--------------|-------------------|--------------------------------------------|-------------------------|-----------------|-------------------|---------------------------------|---------------|----------------------------|---------------------|-----------|
| E 9501 / 2 A | D                 | 820 x 570 x 975                            | 700 x 445               | Aluminium       | 2                 | 540                             | 125           | 120                        | 11.5                | 223950102 |
| E 9501 / 3 A | D                 | 820 x 570 x 975                            | 700 x 445               | Aluminium       | 3                 | 255                             | 125           | 100                        | 15                  | 223950103 |
| E 9501 / 4 A | D                 | 820 x 570 x 975                            | 700 x 445               | Aluminium       | 4                 | 160                             | 125           | 240                        | 18.5                | 223950104 |
| E 9502 / 2 A | D                 | 1060 x 740 x 975                           | 935 x 615               | Aluminium       | 2                 | 540                             | 125           | 120                        | 13.5                | 223950202 |
| E 9502 / 3 A | D                 | 1060 x 740 x 975                           | 935 x 615               | Aluminium       | 3                 | 255                             | 125           | 180                        | 18                  | 223950203 |
| E 9502 / 4 A | D                 | 1060 x 740 x 975                           | 935 x 615               | Aluminium       | 4                 | 160                             | 125           | 240                        | 22.5                | 223950204 |
| E 9501 / 2 E | D                 | 820 x 570 x 975                            | 700 x 445               | Stainless steel | 2                 | 540                             | 125           | 120                        | 15                  | 223950112 |
| E 9501 / 3 E | D                 | 820 x 570 x 975                            | 700 x 445               | Stainless steel | 3                 | 255                             | 125           | 100                        | 20                  | 223950113 |
| E 9501 / 4 E | D                 | 820 x 570 x 975                            | 700 x 445               | Stainless steel | 4                 | 160                             | 125           | 240                        | 25                  | 223950114 |
| E 9502 / 2 E | D                 | 1060 x 740 x 975                           | 935 x 615               | Stainless steel | 2                 | 540                             | 125           | 120                        | 20                  | 223950212 |
| E 9502 / 3 E | D                 | 1060 x 740 x 975                           | 935 x 615               | Stainless steel | 3                 | 255                             | 125           | 180                        | 27.5                | 223950213 |
| E 9502 / 4 E | D                 | 1060 x 740 x 975                           | 935 x 615               | Stainless steel | 4                 | 160                             | 125           | 240                        | 35                  | 223950214 |

**Serving trolley**  
**G®-SERV E 9001 A | E 9002 A**  
**G®-SERV E 9001 E | E 9002 E**  
**for self-assembly**

- 
- 
- 
- 
- 

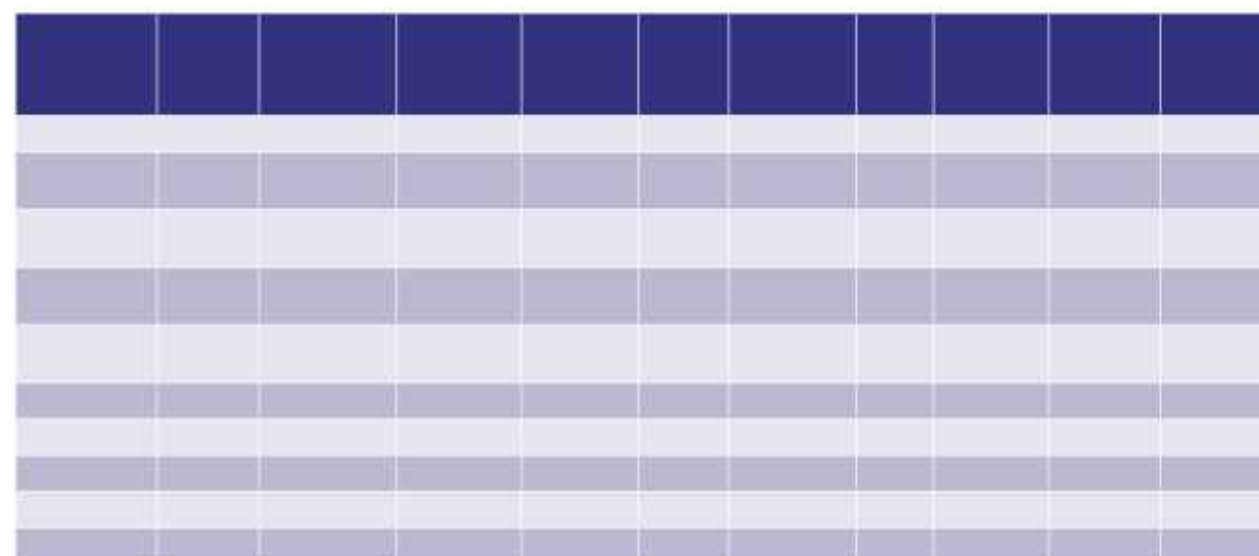

**Our special serving trolley solutions:**





**We are certified!**  
Have confidence in our quality.

Scope of certification:  
Design, development, manufacturing and  
distribution of light alloy systems

**GMÖHLING Transportgeräte GmbH**

Stadelner Hauptstr. 34  
90765 Fürth | Germany  
Phone +49 (0) 911 7669-0  
Fax +49 (0) 911 7669-277  
info@gmoehling.com