



Wall Mounted Enclosures



Specifications :

- Wide range of sizes to cover the user needs.
- Protection Class - IP 55.
- Removable Door.
- Welded earth studs with earthing wire.
- Powder coated to RAL 7032 Textured.
- Wall or floor mounting.

Features


- Made from high quality CR Sheet of various sizes from 1.2 mm to 2.5 mm and are electro-statically powder coated to RAL 7032 textured.
- Mounting plate made of CR with powder coating or galvanized (GI).
- The mounting plate is held by strong studs and removable for installations of components.
- Vertical door stiffness with pre-punched rails for easy installations of wiring harness etc.
- The doors are reversible for left/right side opening with 120° angle opening hinges.
- The door has double bit locks with key.
- A large cable entry area is provided through sealed removable gland plate.
- Optional : Colour Shades, Canopy, Gland Box, Locks, Mounting Brackets, Non standard sizes, etc.



Specifications

Code	Sizes in mm			Sheet Thickness		Mounting Plates	No. of Doors	No. of Locks
	Width	Height	Depth	Enclosure	Door			
ME-020215	200	200	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-022515	200	250	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-020315	200	300	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-020320	200	200	200	1.50 mm	1.50 mm	2.00 mm	1	1
ME-025315	250	300	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-025320	250	300	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-030315	300	300	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-030320	300	300	200	1.50 mm	1.50 mm	2.00 mm	1	1
ME-030415	300	400	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-030420	300	400	200	1.50 mm	1.50 mm	2.00 mm	1	1
ME-030421	300	400	210	1.50 mm	1.50 mm	2.00 mm	1	1
ME-030520	300	500	200	1.50 mm	1.50 mm	2.00 mm	1	1
ME-030525	300	500	250	1.50 mm	1.50 mm	2.00 mm	1	1
ME-040315	400	300	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-040320	400	300	200	1.50 mm	1.50 mm	2.00 mm	1	1
ME-040415	400	400	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-040420	400	400	200	1.50 mm	1.50 mm	2.00 mm	1	1
ME-040515	400	500	150	1.50 mm	1.50 mm	2.00 mm	1	1
ME-040520	400	500	200	1.50 mm	1.50 mm	2.00 mm	1	1
ME-040525	400	500	250	1.50 mm	1.50 mm	2.00 mm	1	1
ME-040620	400	600	200	1.50 mm	1.50 mm	2.00 mm	1	2
ME-040621	400	600	210	1.50 mm	1.50 mm	2.00 mm	1	2
ME-040625	400	600	250	1.50 mm	1.50 mm	2.00 mm	1	2
ME-050520	500	500	200	1.50 mm	1.50 mm	2.00 mm	1	2
ME-050620	500	600	200	1.50 mm	1.50 mm	2.00 mm	1	2
ME-050720	500	700	200	1.50 mm	1.50 mm	2.00 mm	1	2
ME-050725	500	700	250	1.50 mm	1.50 mm	2.00 mm	1	2
ME-060621	600	600	210	1.50 mm	1.50 mm	2.00 mm	1	2
ME-060625	600	600	250	1.50 mm	1.50 mm	2.00 mm	1	2
ME-060820	600	800	200	1.50 mm	1.50 mm	2.50 mm	1	2
ME-060821	600	800	210	1.50 mm	1.50 mm	2.50 mm	1	2
ME-060825	600	800	250	1.50 mm	1.50 mm	2.50 mm	1	2
ME-061020	600	1000	200	1.50 mm	1.50 mm	2.50 mm	1	2
ME-061025	600	1000	250	1.50 mm	1.50 mm	2.50 mm	1	2
ME-061220	600	1200	200	1.50 mm	1.50 mm	2.50 mm	1	2
ME-061221	600	1200	210	1.50 mm	1.50 mm	2.50 mm	1	2
ME-061225	600	1200	250	1.50 mm	1.50 mm	2.50 mm	1	2
ME-061230	600	1200	300	1.50 mm	1.50 mm	2.50 mm	1	2
ME-080821	800	800	210	1.50 mm	1.50 mm	2.50 mm	1	2
ME-080825	800	800	250	1.50 mm	1.50 mm	2.50 mm	1	2
ME-080830	800	800	300	1.50 mm	1.50 mm	2.50 mm	1	2
ME-081025	800	1000	250	1.50 mm	1.50 mm	2.50 mm	1	2
ME-081030	800	100	300	1.50 mm	1.50 mm	2.50 mm	1	2
ME-081225	800	1200	250	1.50 mm	1.50 mm	2.50 mm	1	2
ME-081230	800	1200	300	1.50 mm	1.50 mm	2.50 mm	1	2

Dimensions

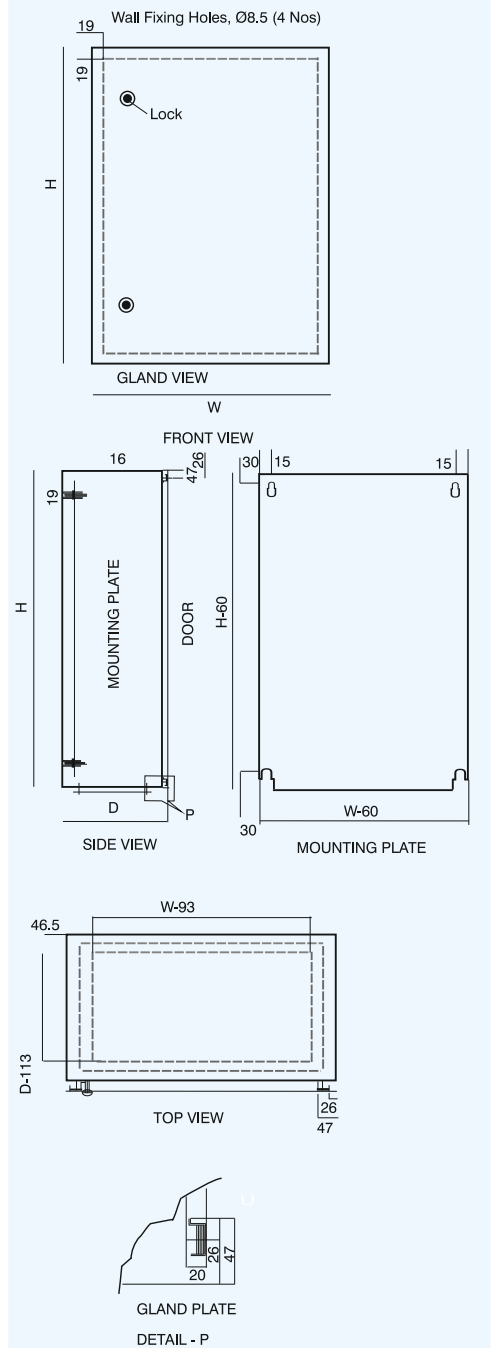

SRK IMPEX

F8, Niharika Plaza, Gladys Alwares Marg,
Off Pokhran Road No. 2, Thane (West) 400 610. INDIA
T: 91-22-2173 1008 M: +91 98204 51599
E: srk@srkimpex.co.in **skype:** srk.srkimpex
W: www.srkimpex.co.in